


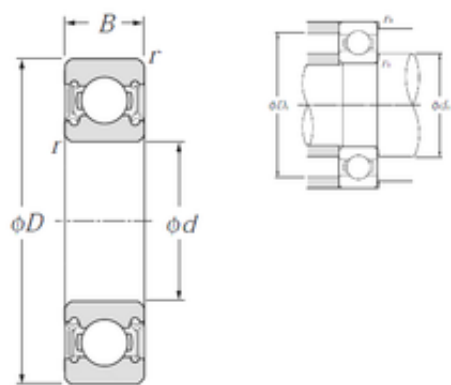

Bearing No. 6905LLU

D	42 mm
d	25 mm
B	9 mm
C	9 mm
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
da max	29 mm
UNSPSC	31171504
Weight	0,042 Kg
r min.	0,3 mm
Da max.	40 mm
ra max.	0,3 mm
series:	69
da min.	27 mm
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	25x42x9
Width (mm)	9
bore type:	Round
maximum rpm:	9800 RPM
Weight / LBS	0.093
Inch - Metric	Metric
Cage Material	Steel
closure type:	Double Sealed
Product Group	B00308
Bearing number	6905LLU
Other Features	Deep Groove Double Lip Friction Nitrile

	Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Keyword String	Ball
cage material:	Steel
Enclosure Type	Contact Seal
bore diameter:	25 mm
overall width:	9 mm
fillet radius:	0.3 mm
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	9 800 r/min
Outer Race Width	0.354 Inch 9 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	25MM Bore; 42MM Outside Diameter; 9MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; C
Outside Diameter	1.654 Inch 42 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	0
outer ring width:	9 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	9 mm
precision rating:	ISO Class 0

outside diameter:	42 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	25
snap ring included:	Without Snap Ring
Outer Diameter (mm)	42
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	4550 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	9800 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	7050 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	7,05 kN
Basic static load rating (C0)	4,55 kN
Maximum Capacity / Filling Slot	No