


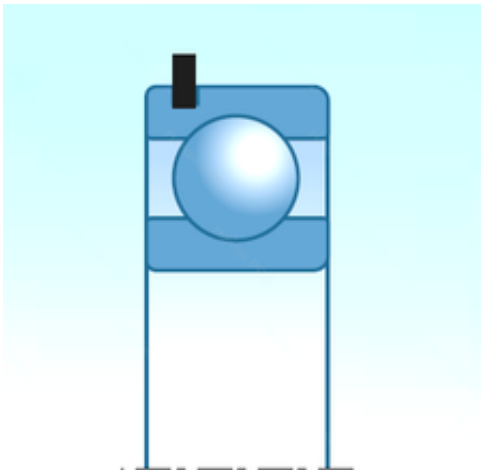

Bearing No. 6902ZZNR

C	7,000 mm
d	15,000 mm
B	7,000 mm
D	28,000 mm
Noun	Bearing
Bore	0.591 Inch 15 Millimeter
UNSPSC	31171504
series:	69
Category	Single Row Ball Bearing
Size (mm)	15x28x7
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	7,000
bore type:	Round
maximum rpm:	24000 RPM
Weight / LBS	0.037
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6902ZZNR
bore diameter:	15 mm
overall width:	7 mm
fillet radius:	0.3 mm
cage material:	Steel
Keyword String	Ball
Other Features	Deep Groove With Snap Ring Shell Alvania Prelubricated

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	15MM Bore; 28MM Outside Diameter; 7MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.276 Inch 7 Millimeter
Outside Diameter	1.102 Inch 28 Millimeter
Weight / Kilogram	0
Manufacturer Name	NTN
outer ring width:	7 mm
precision rating:	ISO Class 0
outside diameter:	28 mm
inner ring width:	7 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	15,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	28,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	2000 N
maximum rpm (grease):	24000 rpm

dynamic load capacity:	3650 N
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No