


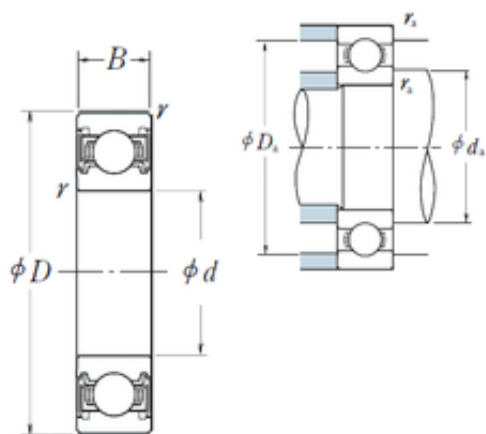

Bearing No. 6902VV

D	28 mm
d	15 mm
B	7 mm
C	7 mm
r	0.3
Z_	10
D_	28
B_	7
ra	0.3
C0	2.26
fo	14.3
DI_	17.531
SRI	2.05
SRE	2.05
D_a	26
DA_	3.969
DE_	25.469
Noun	Bearing
SREX	0.015
SREN	-0.015
SRIX	0.015
mass	0.015
Bore	0.591 Inch 15 Millimeter
bomp	0
KBRG	6151
SDM_	21.5
yobi	6902VV
SBRG	19
SRIN	-0.015

UNSPSC	31171504
da min	17
r min.	0,3 mm
LangID	1
da max	17 mm
ALPHA_	0
C_conv	4350
Weight	0,015 Kg
Da max.	26 mm
GRS rpm	26000
hidYobi	6902VV
series:	69
da min.	17 mm
ra max.	0,3 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	15x28x7
Enclosure	2 Seals
Inventory	0.0
Snap Ring	No
bore type:	Round
Width (mm)	7
Prod_Type3	DGBB_SR_VV
maximum rpm:	26000 RPM
Weight / LBS	0.016
Cage Material	Steel
Product Group	B00308
closure type:	Double Sealed
Inch - Metric	Metric
Bearing number	6902VV
fillet radius:	0.3 mm
Enclosure Type	Non-Contact Seal

cage material:	Steel
overall width:	7 mm
Keyword String	Ball
bore diameter:	15 mm
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Outside Diameter	1.102 Inch 28 Millimeter
Long Description	15MM Bore; 28MM Outside Diameter; 7MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.276 Inch 7 Millimeter
Weight / Kilogram	0.01
outside diameter:	28 mm
precision rating:	ABEC 1 (ISO Class Normal)
outer ring width:	7 mm
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	15
Outer Diameter (mm)	28
internal clearance:	C0
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	2260 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	4350 N

Manufacturer Item Number	6902VV
Internal Special Features	No
(Grease) Lubrication Speed	26 000 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	2,26 kN
Basic dynamic load rating (C)	4,35 kN
Maximum Capacity / Filling Slot	No