


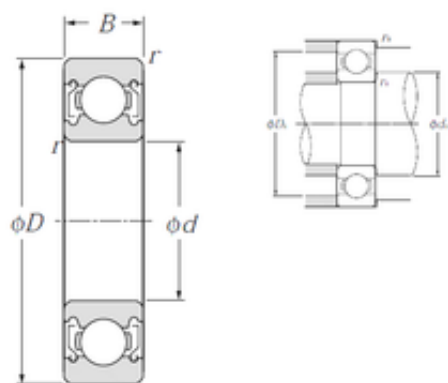

Bearing No. 6902ZZ

D	28 mm
d	15 mm
B	7 mm
C	7 mm
rn	0,3 mm
Noun	Bearing
Bore	0.591 Inch 15 Millimeter
UNSPSC	31171504
da max	17,5 mm
Weight	0,016 Kg
r min.	0,3 mm
da min.	17 mm
Da max.	26 mm
ra max.	0,3 mm
series:	69
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	15x28x7
Inventory	0.0
Snap Ring	No
Width (mm)	7
bore type:	Round
Weight / LBS	0.036
maximum rpm:	24000 RPM
closure type:	Double Shielded
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Keyword String	Ball

Other Features	Deep Groove Shell Alvania Prelubricated
Bearing number	6902ZZ
bore diameter:	15 mm
overall width:	7 mm
cage material:	Steel
fillet radius:	0.3 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	1.102 Inch 28 Millimeter
Outer Race Width	0.276 Inch 7 Millimeter
Long Description	15MM Bore; 28MM Outside Diameter; 7MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
bearing material:	High Carbon Chrome Steel
outside diameter:	28 mm
inner ring width:	7 mm
Manufacturer Name	NTN
Weight / Kilogram	0.016
outer ring width:	7 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	15
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
Outer Diameter (mm)	28

internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	2000 N
maximum rpm (grease):	24000 rpm
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	3650 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6902ZZ/2AS
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	24 000 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	3,65 kN
Basic static load rating (C0)	2 kN
Maximum Capacity / Filling Slot	No