


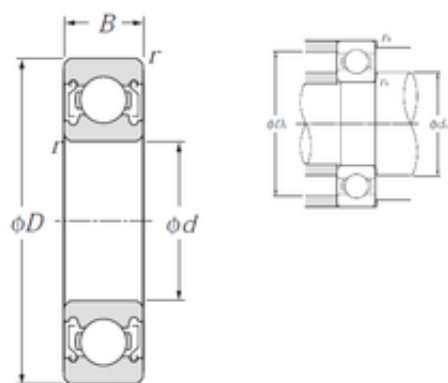

Bearing No. 6900ZZ

D	22 mm
d	10 mm
B	6 mm
C	6 mm
rn	0,3 mm
Bore	0.394 Inch 10 Millimeter
Noun	Bearing
Weight	0,009 Kg
r min.	0,3 mm
UNSPSC	31171504
da max	13 mm
da min.	12 mm
Da max.	20 mm
ra max.	0,3 mm
series:	69
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	10x22x6
Inventory	0.0
Snap Ring	No
Width (mm)	6
bore type:	Round
maximum rpm:	30000 RPM
Weight / LBS	0.021
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
bore diameter:	10 mm

Keyword String	Ball
overall width:	6 mm
cage material:	Steel
fillet radius:	0.3 mm
Bearing number	6900ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	10MM Bore; 22MM Outside Diameter; 6MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	0.866 Inch 22 Millimeter
Outer Race Width	0.236 Inch 6 Millimeter
outside diameter:	22 mm
outer ring width:	6 mm
inner ring width:	6 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.01
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	10
Outer Diameter (mm)	22
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A

maximum rpm (grease):	30000 rpm
static load capacity:	1270 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	2700 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6900ZZ/2AS
Internal Special Features	No
(Grease) Lubrication Speed	30 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	2,7 kN
Basic static load rating (C0)	1,27 kN
Maximum Capacity / Filling Slot	No