


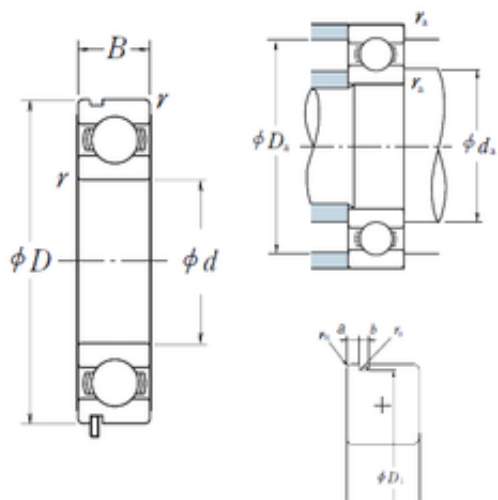

Bearing No. 6900N

a	1,05 mm
r	0.3
d	10 mm
D	22 mm
B	6 mm
C	6 mm
b	0,8 mm
fo	14
B_	6
ra	0.3
C0	1.27
D1	20,8 mm
D_	22
Z_	9
rn	0,2 mm
ro	0.2
DE_	19.175
SRI	1.64
D_a	20
DA_	3.175
SRE	1.64
DI_	12.825
yobi	6900N
mass	0.009
SBRG	19
bomp	0
KBRG	6101
SREX	0.015
SREN	-0.015
SRIN	-0.015

SDM_	16
SRIX	0.015
ALPHA_	0
r min.	0,3 mm
C_conv	2700
da max	12,5 mm
da min	12
Weight	0,009 Kg
LangID	1
ra max.	0,3 mm
Da max.	20 mm
Oil rpm	38000
da min.	12 mm
r0 max.	0,2 mm
hidYobi	6900N
GRS rpm	32000
hidTable	ecat_NSRDGB
Size (mm)	10x22x6
Prod_Type3	DGBB_SR_N_OT
Width (mm)	6
Bearing number	6900N
Bore Diameter (mm)	10
Outer Diameter (mm)	22
(Oil) Lubrication Speed	38 000 r/min
(Grease) Lubrication Speed	32 000 r/min
Basic dynamic load rating (C)	2,7 kN
Basic static load rating (C0)	1,27 kN