


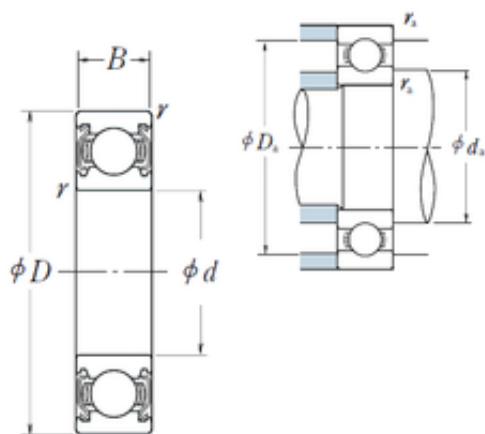

Bearing No. 6820ZZ

D	125 mm
d	100 mm
B	13 mm
C	13 mm
r	1
Z_	26
B_	13
D_	125
ra	1
C0	23
fo	17.3
DI_	105.356
SRI	3.7
D_a	120
DE_	119.644
DA_	7.144
SRE	3.7
SRIN	-0.02
SBRG	18
yobi	6820ZZ
SDM_	112.5
SREX	0.02
KBRG	6141
bomp	0
mass	0.31
SRIX	0.02
Bore	3.937 Inch 100 Millimeter
SREN	-0.02
Noun	Bearing

ALPHA_	0
da min	105
LangID	1
r min.	1 mm
UNSPSC	31171504
da max	105,5 mm
C_conv	19600
Weight	0,31 Kg
ra max.	1 mm
hidYobi	6820ZZ
GRS rpm	4800
Da max.	120 mm
da min.	105 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	100x125x13
Enclosure	2 Metal Shields
Inventory	0.0
Width (mm)	13
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.6836
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6820ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	4.921 Inch 125 Millimeter
Outer Race Width	0.512 Inch 13

	Millimeter
Long Description	100MM Bore; 125MM Outside Diameter; 13MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.3
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min
Basic static load rating (C0)	23 kN
Basic dynamic load rating (C)	19,6 kN
Maximum Capacity / Filling Slot	No