


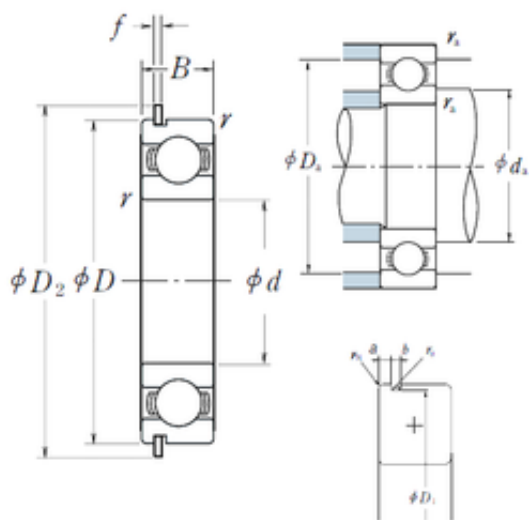

Bearing No. 6820NR

f	1,12 mm
r	1
d	100 mm
D	125 mm
B	13 mm
C	13 mm
a	2,1 mm
b	1,3 mm
D2	130,7 mm
B_	13
Cy	2.9
ra	1
C0	23
fo	17.3
D_	125
D1	122,6 mm
rn	0,5 mm
Z_	26
Dx	132
ro	0.4
DE_	119.644
DA_	7.144
SRI	3.7
D_a	120
SRE	3.7
DI_	105.356
SRIN	-0.02
yobi	6820NR
SBRG	18
bomp	0

SREX	0.02
KBRG	6101
SREN	-0.02
SDM_	112.5
SRIX	0.02
mass	0.31
C_conv	19600
r min.	1 mm
da max	105,5 mm
ALPHA_	0
Weight	0,31 Kg
da min	105
LangID	1
GRS rpm	4800
Da max.	120 mm
hidYobi	6820NR
Oil rpm	5600
da min.	105 mm
r0 max.	0,4 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Size (mm)	100x125x13
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	13
Bearing number	6820NR
Bore Diameter (mm)	100
Outer Diameter (mm)	125
(Oil) Lubrication Speed	5 600 r/min
(Grease) Lubrication Speed	4 800 r/min
Basic dynamic load rating (C)	19,6 kN
Basic static load rating	23 kN

(C0)	
------	--