


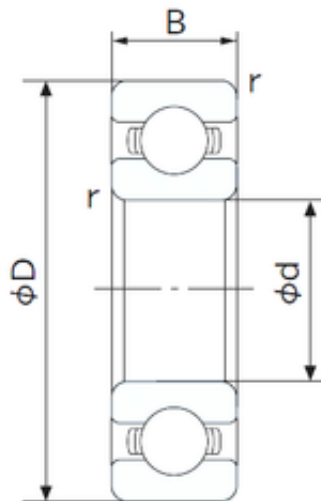

Bearing No. 16030

D	225 mm
d	150 mm
B	24 mm
C	24 mm
Width	24 mm
Weight	3.58 Kg
r min.	1.1 mm
da min.	164 mm
Da max.	211 mm
ra max.	1.0 mm
ra (max)	1 mm
da (min)	164 mm
Da (max)	211 mm
Bore Size	150 mm
Factor fo	16.5
Size (mm)	150x225x24
Enclosure	Open
Bore Type	Cylindrical Bore
Width (mm)	24
Configuration	Single Row
Bearing number	16030
Radial Clearance	0.018 to 0.053 mm
Outside Diameter	225 mm
Static Load Rating	82,500 N
Bore Diameter (mm)	150
Dynamic Load Rating	76,500 N
Outer Diameter (mm)	225
Limiting Speed - Oil	3,200 rpm
Fillet Radius/Chamfer	1.1 mm
Limiting Speed - Grease	2,800 rpm

(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	82,5 kN
Basic dynamic load rating (C)	76,5 kN