


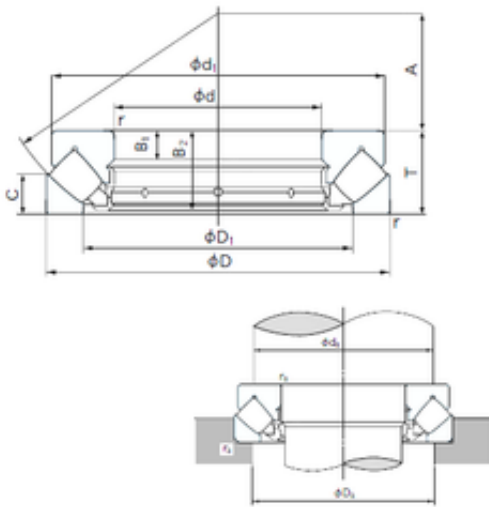

Bearing No. 29268E

C	37 mm
B	21 mm
d	340 mm
D	460 mm
T	73 mm
A	183 mm
B1	21 mm
D1	395 mm
d1	445 mm
B2	69 mm
Width	73 mm
r min.	3 mm
Weight	34.5 Kg
da min.	395 mm
Da max.	420 mm
ra max.	2.5 mm
da (min)	395 mm
Da (max)	420 mm
ra (max)	2.5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	340 mm
Size (mm)	340x460x73
Width (mm)	73
Configuration	Single Row
Bearing number	29268E
Outside Diameter	460 mm
Static Load Rating	6,350,000 N
Bore Diameter (mm)	340
Dynamic Load Rating	1,290,000 N

Outer Diameter (mm)	460
Limiting Speed - Oil	950 rpm
Fillet Radius/Chamfer	3 mm
Basic dynamic load rating (C)	1290 kN
Basic static load rating (C0)	6350 kN