


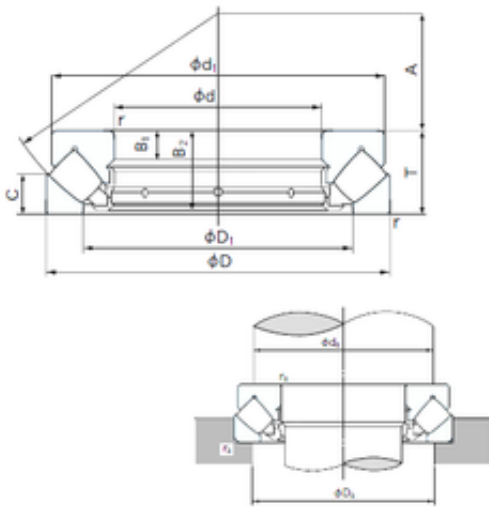

Bearing No. 29272E

C	44 mm
B	25 mm
d	360 mm
D	500 mm
T	85 mm
A	194 mm
B1	25 mm
D1	423 mm
d1	485 mm
B2	81 mm
Width	85 mm
r min.	4 mm
Weight	50.4 Kg
da min.	420 mm
Da max.	455 mm
ra max.	3 mm
da (min)	420 mm
Da (max)	455 mm
ra (max)	3 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	360 mm
Size (mm)	360x500x85
Width (mm)	85
Configuration	Single Row
Bearing number	29272E
Outside Diameter	500 mm
Static Load Rating	8,050,000 N
Bore Diameter (mm)	360
Dynamic Load Rating	1,650,000 N

Outer Diameter (mm)	500
Limiting Speed - Oil	830 rpm
Fillet Radius/Chamfer	4 mm
Basic dynamic load rating (C)	1650 kN
Basic static load rating (C0)	8050 kN