




Bearing No. 40TAB07-2NK

|                          |                  |
|--------------------------|------------------|
| D                        | 72 mm            |
| d                        | 40 mm            |
| B                        | 15 mm            |
| C                        | 15 mm            |
| 2B                       | 30 mm            |
| r1                       | 0.6 mm           |
| da2                      | 49.7 mm          |
| da1                      | 56.2 mm          |
| Da2                      | 64.9 mm          |
| Da1                      | 57.5 mm          |
| Width                    | 15 mm            |
| r min.                   | 1 mm             |
| Weight                   | 0,26 Kg          |
| r1 min.                  | 0,6 mm           |
| Bore Size                | 40 mm            |
| Enclosure                | Double Seal      |
| Size (mm)                | 40x72x15         |
| Bore Type                | Cylindrical Bore |
| Width (mm)               | 15               |
| Configuration            | Single Row       |
| Bearing number           | 40TAB07-2NK      |
| Angle (?)                | 60 °             |
| Outside Diameter         | 72 mm            |
| Static Load Rating       | 54,300 N         |
| Bore Diameter (mm)       | 40               |
| Dynamic Load Rating      | 32,500 N         |
| Outer Diameter (mm)      | 72               |
| Limiting Speed - Oil     | 2,600 rpm        |
| Fillet Radius/Chamfer    | 1 mm             |
| Basic static load rating | 54,3 kN          |

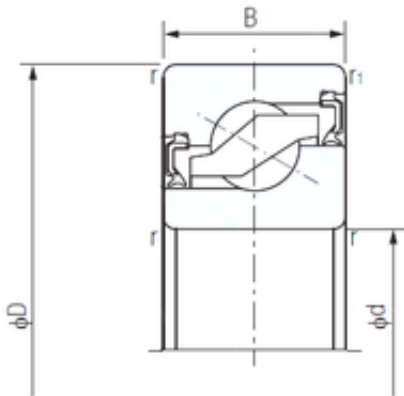

|                                      |         |
|--------------------------------------|---------|
| (C0)                                 |         |
| Basic dynamic load rating (C)        | 32,5 kN |
| Starting Torque - Grease Lubrication | 25 N·cm |