


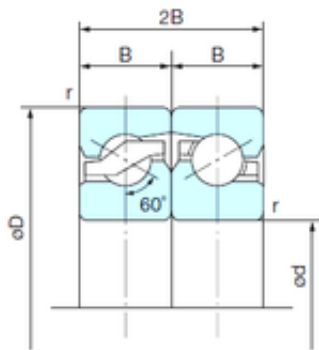

Bearing No. 40TAB07DF

D	72 mm
d	40 mm
B	15 mm
C	15 mm
r1	0.6 mm
2B	30 mm
Width	15 mm
r min.	1 mm
Weight	0.26 Kg
r1 min.	0.6 mm
Da2 (max)	63.4 mm
Enclosure	Open
Da1 (max)	56 mm
da2 (min)	49.7 mm
da1 (min)	56.2 mm
Bore Size	40 mm
Bore Type	Cylindrical Bore
Size (mm)	40x72x15
Width (mm)	15
Configuration	Double Row
Bearing number	40TAB07DF
Angle (?)	60 °
Outside Diameter	72 mm
Static Load Rating	54,300 N
Bore Diameter (mm)	40
Dynamic Load Rating	32,500 N
Outer Diameter (mm)	72
Limiting Speed - Oil	5,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	3,750 rpm

Basic static load rating (C0)	54,3 kN
Basic dynamic load rating (C)	32,5 kN
Starting Torque - Grease Lubrication	25 N·cm