




Bearing No. 40TAB09-2NK

D	90 mm
d	40 mm
B	20 mm
C	20 mm
2B	40 mm
r1	0.6 mm
da2	57.2 mm
da1	67.2 mm
Da2	79.9 mm
Da1	68.5 mm
Width	20 mm
r min.	1 mm
Weight	0,62 Kg
r1 min.	0,6 mm
Bore Size	40 mm
Enclosure	Double Seal
Size (mm)	40x90x20
Bore Type	Cylindrical Bore
Width (mm)	20
Configuration	Single Row
Bearing number	40TAB09-2NK
Angle (?)	60 °
Outside Diameter	90 mm
Static Load Rating	101,000 N
Bore Diameter (mm)	40
Dynamic Load Rating	65,000 N
Outer Diameter (mm)	90
Limiting Speed - Oil	2,200 rpm
Fillet Radius/Chamfer	1 mm
Basic static load rating	101 kN

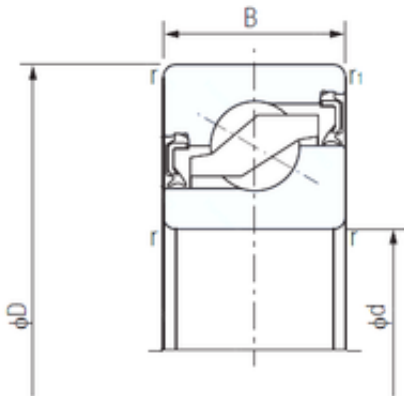

(C0)	
Basic dynamic load rating (C)	65 kN
Starting Torque - Grease Lubrication	30 N·cm