


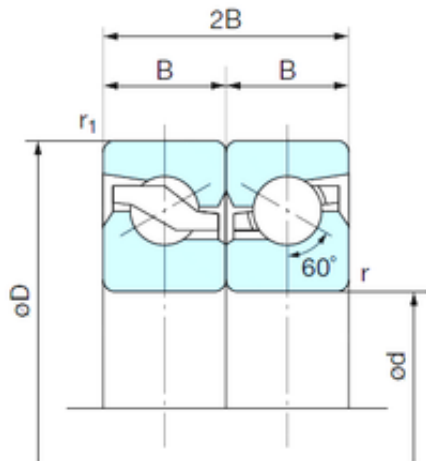

Bearing No. 40TAB09DB

|                         |                  |
|-------------------------|------------------|
| D                       | 90 mm            |
| d                       | 40 mm            |
| B                       | 20 mm            |
| C                       | 20 mm            |
| r1                      | 0.6 mm           |
| 2B                      | 40 mm            |
| Width                   | 20 mm            |
| r min.                  | 1 mm             |
| Weight                  | 0.62 Kg          |
| r1 min.                 | 0.6 mm           |
| Da2 (max)               | 78.4 mm          |
| Enclosure               | Open             |
| Da1 (max)               | 67 mm            |
| da2 (min)               | 57.2 mm          |
| da1 (min)               | 67.2 mm          |
| Bore Size               | 40 mm            |
| Bore Type               | Cylindrical Bore |
| Size (mm)               | 40x90x20         |
| Width (mm)              | 20               |
| Configuration           | Double Row       |
| Bearing number          | 40TAB09DB        |
| Angle (?)               | 60 °             |
| Outside Diameter        | 90 mm            |
| Static Load Rating      | 101,000 N        |
| Bore Diameter (mm)      | 40               |
| Dynamic Load Rating     | 65,000 N         |
| Outer Diameter (mm)     | 90               |
| Limiting Speed - Oil    | 4,000 rpm        |
| Fillet Radius/Chamfer   | 1 mm             |
| Limiting Speed - Grease | 3,150 rpm        |
|                         |                  |

|                                      |         |
|--------------------------------------|---------|
| Basic static load rating (C0)        | 101 kN  |
| Basic dynamic load rating (C)        | 65 kN   |
| Starting Torque - Grease Lubrication | 30 N·cm |