




Bearing No. 40TAB09DF

D	90 mm
d	40 mm
B	20 mm
C	20 mm
r1	0.6 mm
2B	40 mm
Width	20 mm
r min.	1 mm
Weight	0.62 Kg
r1 min.	0.6 mm
Da2 (max)	78.4 mm
Enclosure	Open
Da1 (max)	67 mm
da2 (min)	57.2 mm
da1 (min)	67.2 mm
Bore Size	40 mm
Bore Type	Cylindrical Bore
Size (mm)	40x90x20
Width (mm)	20
Configuration	Double Row
Bearing number	40TAB09DF
Angle (?)	60 °
Outside Diameter	90 mm
Static Load Rating	101,000 N
Bore Diameter (mm)	40
Dynamic Load Rating	65,000 N
Outer Diameter (mm)	90
Limiting Speed - Oil	4,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	3,150 rpm

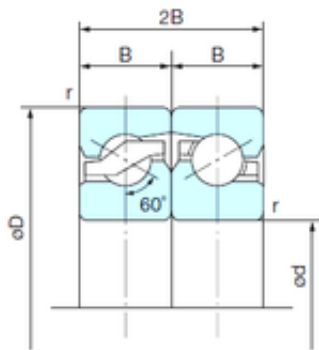

Basic static load rating (C0)	101 kN
Basic dynamic load rating (C)	65 kN
Starting Torque - Grease Lubrication	30 N·cm