


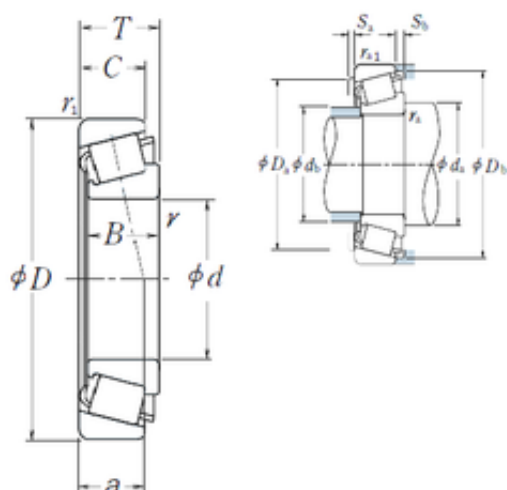

Bearing No. T2ED095

D	160 mm
d	95 mm
T	46 mm
B	46 mm
C	38 mm
a	34,5 mm
e	0.34
Cr	28800
Y0	0.97
db	108
da	113
Y1	1.8
B_	46
Sb	8
C0	445
Sa	6
D_	160
Z_	24
C_	38
C0r	45500
DA_	15.589
Iso	2ED
DE_	143.286
D_b	152
DI_	112.36
SBRG	2ED
SDM_	127.823
D_a2	141
KBRG	3111
yobi	T2ED095

D_a1	146
mass	3.74
TC-RA	341.272
r min.	3 mm
Weight	3,74 Kg
TC-DA1	16.378
TC-DA2	14.799
TC-SLR	33
Da min	141 mm
LangID	1
ALPHA_	12.717
Db min.	152 mm
Oil rpm	3000
db max.	108 mm
Da max.	146 mm
ra max.	2,5 mm
hidYobi	T2ED095
da min.	113 mm
T-ALP21	25
rb max.	2,5 mm
T-ALP22	26
T-ALP23	0
GRS rpm	2200
inner r	3
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2.5
outer rb	2.5
TC-BET22	45

Size (mm)	95x160x46
Width (mm)	46
Prod_Type3	TRBSR_MD_A
Bearing number	T2ED095
Bore Diameter (mm)	95
Outer Diameter (mm)	160
Calculation factor (e)	0,34
Calculation factor (Y0)	0,97
(Oil) Lubrication Speed	3000 r/min
(Grease) Lubrication Speed	2200 r/min
Basic dynamic load rating (C)	283 kN
Basic static load rating (C0)	445 kN