


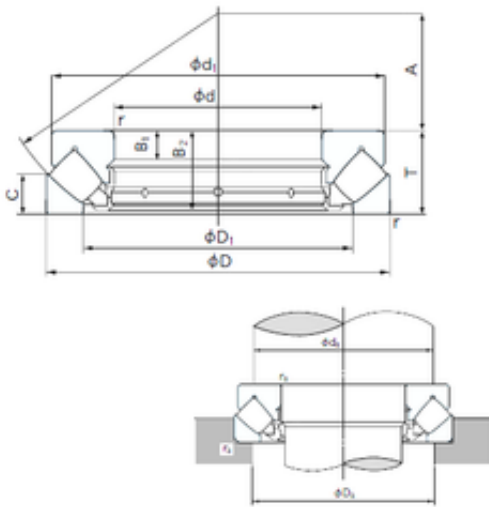

Bearing No. 29284E

C	46 mm
B	30 mm
d	420 mm
D	580 mm
T	95 mm
A	225 mm
B1	30 mm
D1	489 mm
d1	564 mm
B2	91 mm
Width	95 mm
r min.	5 mm
Weight	74.9 Kg
da min.	490 mm
Da max.	525 mm
ra max.	4 mm
da (min)	490 mm
Da (max)	525 mm
ra (max)	4 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	420 mm
Size (mm)	420x580x95
Width (mm)	95
Configuration	Single Row
Bearing number	29284E
Outside Diameter	580 mm
Static Load Rating	11,300,000 N
Bore Diameter (mm)	420
Dynamic Load Rating	2,260,000 N

Outer Diameter (mm)	580
Limiting Speed - Oil	700 rpm
Fillet Radius/Chamfer	5 mm
Basic dynamic load rating (C)	2260 kN
Basic static load rating (C0)	11300 kN