


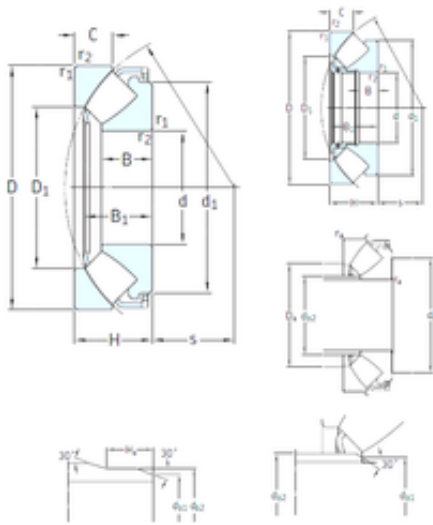

Bearing No. 29292

B	61,5 mm
D	620 mm
s	245 mm
C	46 mm
H	95 mm
d	460 mm
d1	605 mm
B1	91 mm
D1	530 mm
Noun	Bearing
UNSPSC	31171507
Bore 2	20.866 Inch 530 Millimeter
Banded	No
Bore 1	18.11 Inch 460 Millimeter
Height	3.74 Inch 95 Millimeter
Weight	81 Kg
ra max.	4 mm
Da max.	565 mm
da min.	540 mm
r2 min.	5 mm
r1 min.	5 mm
Category	Thrust Roller Bearings
Inventory	0.0
Size (mm)	460x620x46
Keyword 3	Spherical
Width (mm)	46
Mass bearing	81 kg
Weight / LBS	178.574
Inch - Metric	Metric

Product Group	B04311
Self Aligning	Yes
B ₁	91 mm
Cage Material	Steel
Keyword String	Thrust Roller Spherical
Other Features	Single Row
Bearing number	29292
Thrust Bearing	Yes
Limiting speed	950 r/min
Precision Class	ABEC 1 ISO P0
Rolling Element	Spherical Roller Bearing
Reference speed	600 r/min
Manufacturer URL	http://www.skf.com
Long Description	460MM Bore 1; 530MM Bore 2; 620MM Outside Diameter; 95MM Height; Spherical Roller Bearing; Single Direction; Self Aligning; Not Banded; Steel Cage; ABEC 1 ISO P0; Roller Assembly plus Raceways
Outside Diameter	24.409 Inch 620 Millimeter
Weight / Kilogram	94.3
Manufacturer Name	SKF
Bore Diameter (mm)	460
d _a min.	540 mm
D _a max.	565 mm
r _a max.	4 mm
Outer Diameter (mm)	620
r _{1,2} min.	5 mm
Minimum Buy Quantity	N/A
d ₁ ?	605 mm

D ₁ ?	530 mm
Component Description	Roller Assembly plus Raceways
Harmonized Tariff Code	8482.30.00.40
Fatigue load limit (Pu)	865
Manufacturer Item Number	29292
Single or Double Direction	Single Direction
Basic dynamic load rating C	2070 kN
Minimum axial load factor A	11
Basic dynamic load rating (C)	2070 kN
Basic static load rating (C ₀)	10600 kN
Fatigue load limit P _u	865 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Basic static load rating C ₀	10600 kN