


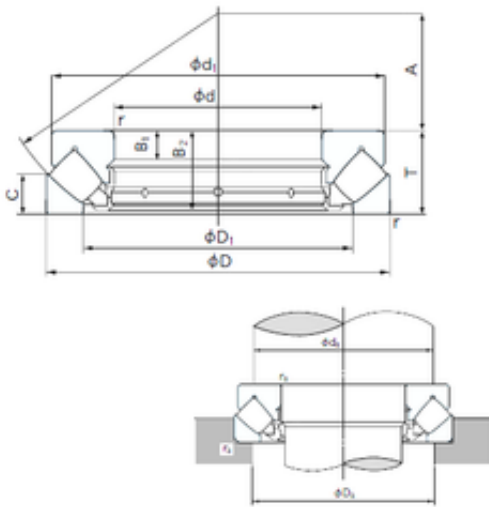

Bearing No. 29292E

C	46 mm
B	30 mm
d	460 mm
D	620 mm
T	95 mm
A	245 mm
B1	30 mm
D1	530 mm
d1	605 mm
B2	91 mm
Width	95 mm
r min.	5 mm
Weight	80.9 Kg
da min.	530 mm
Da max.	570 mm
ra max.	4 mm
da (min)	530 mm
Da (max)	570 mm
ra (max)	4 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	460 mm
Size (mm)	460x620x95
Width (mm)	95
Configuration	Single Row
Bearing number	29292E
Outside Diameter	620 mm
Static Load Rating	11,900,000 N
Bore Diameter (mm)	460
Dynamic Load Rating	2,290,000 N

Outer Diameter (mm)	620
Limiting Speed - Oil	660 rpm
Fillet Radius/Chamfer	5 mm
Basic dynamic load rating (C)	2290 kN
Basic static load rating (C0)	11900 kN