


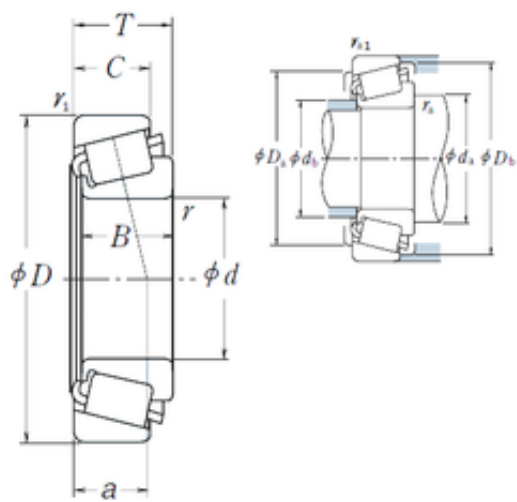

Bearing No. 1280/1220

e	0.35
d	22,225 mm
D	57,15 mm
T	22,225 mm
B	22,225 mm
C	17,462 mm
a	15,1 mm
Da	49 mm
B_	22.225
Db	52 mm
da	29,5 mm
Y0	0.95
db	29 mm
C0	50
D_	57.15
Z_	13
C_	17.462
Y1	1.7
DE_	47.603
SLR	14.5
D_a	49
DI_	32.114
DA1	8.514
DA2	7.423
CUP	0.106
DA_	8.069
D_b	52
RAr	112.603
SDM_	40.086
KBRG	3161

yobi	1280/1220
CONE	0.183
ALP21	26
ALP22	2
ALP23	0
BETA_	2
BET21	4
BET23	0
BET22	20
r min.	0,8 mm
LangID	1
Weight	0,289 Kg
ALPHA_	13
r1 min.	1,5 mm
ra max.	0,8 mm
Oil rpm	9500
outer r	1.5
hidYobi	1280/1220
GRS rpm	7100
inner r	0.8
hidTable	ecat_NSTPRI
inner ra	0.8
outer rb	1.5
ra1 max.	1,5 mm
Size (mm)	22.225x57.15x22.225
SHOG_yobi	1280/1220
Prod_Type3	TRBSR_ID_A
Width (mm)	22,225
Bearing number	1280/1220
Bore Diameter (mm)	22,225
Outer Diameter (mm)	57,15
Calculation factor (e)	0,35

(Oil) Lubrication Speed	9500 r/min
Calculation factor (Y0)	0,95
(Grease) Lubrication Speed	7100 r/min
Basic static load rating (C0)	50 kN
Basic dynamic load rating (C)	48 kN