


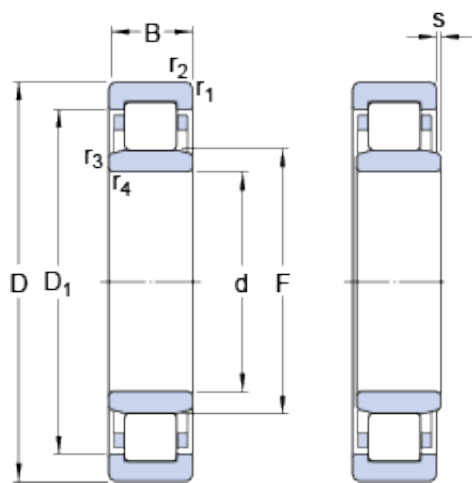

Bearing No. NU 336 ECM

D	380 mm
d	180 mm
B	75 mm
F	231 mm
s	4.2 mm
Bore	7.087 Inch 180 Millimeter
Noun	Bearing
Width	2.953 Inch 75 Millimeter
s max.	4.2 mm
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	Yes
Separable	Inner Ring - Both Sides
Size (mm)	380x180x75
Inventory	0.0
Snap Ring	No
Width (mm)	75
Bore Profile	Straight
Weight / LBS	109.239
Mass bearing	42.7 kg
Inch - Metric	Metric
Product Group	B04144
Cage Material	Brass
D ₁	318.6 mm
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer

	Ring ID
Relubricatable	Yes
Bearing number	NU 336 ECM
Limiting speed	2200 r/min
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Reference speed	1600 r/min
Limiting value e	0.2
Outside Diameter	14.961 Inch 380 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	180MM Bore; Straight Bore Profile; 380MM Outside Diameter; 75MM Width; Brass Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Int
Weight / Kilogram	49.595
Manufacturer Name	SKF
d _a max.	226 mm
D _a max.	361.3 mm
d _b min.	234 mm
Internal Clearance	C0-Medium
r _a max.	3 mm
d _a min.	197 mm
r _b max.	3 mm
Bore Diameter (mm)	380
Outer Diameter (mm)	180
Axial load factor Y	0.6
d _a - max.	226 mm
	234 mm

q^b - min.	
---------------------------------	--

d_a - min.	197 mm
D_a - max.	361.3 mm
r_a - max.	3 mm
r_b - max.	3 mm
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	4 mm
$r_{3,4}$ min.	4 mm
D_1 ?	318.6 mm
Harmonized Tariff Code	8482.50.00.00
$r_{1,2}$ - min.	4 mm
$r_{3,4}$ - min.	4 mm
Manufacturer Item Number	NU 336 ECM
Number of Rows of Rollers	Single Row
Basic dynamic load rating C	1020 kN
Basic dynamic load rating - C	1020 kN
Fatigue load limit P_u	125 kN
Calculation factor k_r	0.15
Calculation factor - k_r	0.15
Fatigue load limit - P_u	125 kN
Basic static load rating C_0	1290 kN
Basic static load rating - C_0	1290 kN