


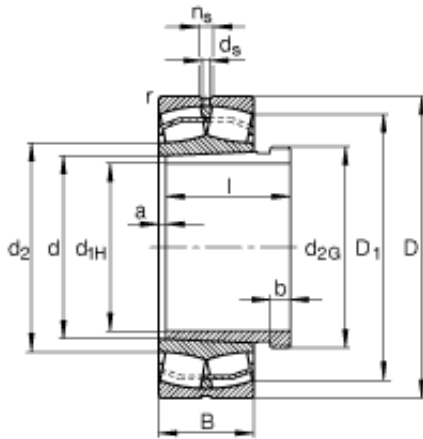

Bearing No. 24168-B-K30 + AH24168-H

l	269 mm
e	0,43
D	580 mm
B	243 mm
a	19 mm
b	26 mm
m	260 kg / Weight
d	340 mm
Size (mm)	320x580x243
Width (mm)	243
d_s	9,5 mm
C_r	4400000 N / Dynamic load rating (radial)
n_s	17,7 mm
D_1	481,1 mm
Y_1	1,56
Y_2	2,32
Y_0	1,53
n_G	920 1/min / Limiting speed
n_B	380 1/min / Reference speed
m_1	28 kg / Weight, withdrawal sleeve
C_{0r}	8500000 N / Static load rating (radial)
Bearing number	24168-B-K30 + AH24168-H
d_{1H}	320 mm
d_{2G}	Tr360X5

C_{ur}	680000 N / Fatigue limit load, radial
r_{min}	5 mm
$r_{a\ max}$	4 mm
$d_{a\ min}$	360 mm
$D_{a\ max}$	560 mm
Bore Diameter (mm)	320
Outer Diameter (mm)	580
- AH24168-H / Designation, withdrawal sleeve	AH24168H / Designation, withdrawal sleeve