




Bearing No. 24168-B-K30+AH24168

n	17,7 mm
C	243 mm
b	26 mm
a	19 mm
l	269 mm
d	340 mm
D	580 mm
B	243 mm
d5	9,5 r/min
D1	481,1 mm
d1	320 mm
Weight	287,9 Kg
r min.	5 mm
da min.	360 mm
Da max.	560 mm
ra max.	4 mm
Size (mm)	340x580x243
Width (mm)	243
Thread (G)	Tr360X5
Limiting speed	800 r/min
Bearing number	24168-B-K30+AH24168
Reference speed	380 r/min
Bore Diameter (mm)	340
Outer Diameter (mm)	580
Calculation factor (e)	0,43
Fatigue load limit (Pu)	680
Calculation factor (Y0)	1,53
Calculation factor (Y1)	1,56
Basic dynamic load rating (C)	4400 kN

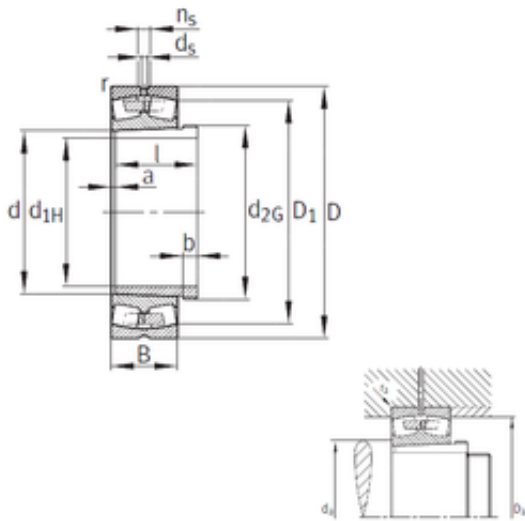

Basic static load rating (C0)	8500 kN
----------------------------------	---------