


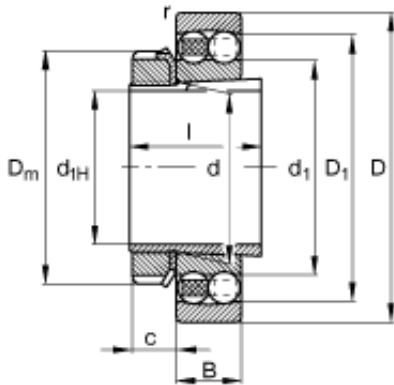

Bearing No. 2305-K-TVH-C3 + H2305

	H2305 / Adapter sleeve
d	25 mm
m	0,328 kg / Weight
e	0,48
D	62 mm
B	24 mm
l	35 mm
c	9 mm
Size (mm)	20x62x24
Width (mm)	24
m ₁	0,09 kg / Weight, adapter sleeve
Y ₁	1,32
d ₁	35,5 mm
Y ₂	2,04
D _m	38 mm
C _r	25000 N / Dynamic load rating (radial)
D ₁	50,1 mm
Y ₀	1,38
n _G	13000 1/min / Limiting speed
n _B	14100 1/min / Reference speed
C _{0r}	6500 N / Static load rating (radial)
Bearing number	2305-K-TVH-C3 + H2305
C _{ur}	405 N / Fatigue limit load, radial
d _{1H}	20 mm

$r_{a\ max}$	1 mm
$d_{b\ min}$	30 mm
$D_{a\ max}$	55 mm
$B_{a\ min}$	5 mm
$d_{a\ max}$	32 mm
Bore Diameter (mm)	20
Outer Diameter (mm)	62