


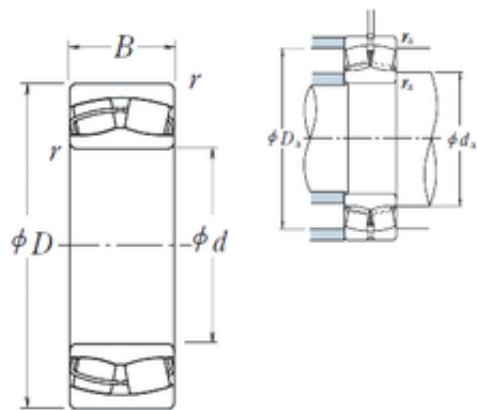

Bearing No. 22206CE4

e	0.33
r	1
d	30 mm
D	62 mm
B	20 mm
C	20 mm
Y3	2.1
C0	50
X2	0.67
X1	1
X0	1
Y0	2
ra	1
Z_	14
B_	20
Y2	3.1
D_	62
Y1	2.1
DE_	55.311
SIR	6.2
DA_	8.7
DI_	38.307
ALP3	0
SDM_	46.809
Noun	Bearing
ALP1	12
ALP2	15
Bore	1.181 Inch 30 Millimeter
SBRG	22

bomp	22206CE4
KBRG	2322
yobi	22206CE4
mass	0.27
Width	0.787 Inch 20 Millimeter
da max	37 mm
ALPHA_	0.214
da min	36
Weight	0,27 Kg
r min.	1 mm
UNSPSC	31171510
LangID	1
Da min	54 mm
da min.	36 mm
hidYobi	22206CE4
GRS rpm	6000
Oil rpm	7500
TSR rpm	8500
Da max.	56 mm
ra max.	1 mm
D_a max	56
series:	222
D_a min	54
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	30x62x20
Macha rpm	0
Width (mm)	20
Prod_Type3	SRB_CTB_CB
bore type:	Straight

cage type:	Inner Ring Guided
Weight / LBS	0.27
Bore Profile	Straight
maximum rpm:	7500 RPM
closure type:	Open
Product Group	B04311
Inch - Metric	Metric
Cage Material	Steel
Bearing number	22206CE4
overall width:	4.3800 in
bore diameter:	30 mm
Relubricatable	Yes
fillet radius:	1 mm
Keyword String	Spherical
cage material:	Steel
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.441 Inch 62 Millimeter
Long Description	30MM Straight Bore; 62MM Outside Diameter; 20MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
outer ring type:	Not Split
outside diameter:	62 mm
Withdrawal Sleeve	Not Applicable

bearing material:	Steel
Manufacturer Name	NSK
Weight / Kilogram	0.27
outer ring width:	20 mm
precision rating:	RBEC 1 (ISO Class Normal)
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	62
internal clearance:	C0
Minimum Buy Quantity	N/A
static load capacity:	50000 N
Calculation factor (e)	0,33
lubrication hole type:	Lubrication Groove & Hole
dynamic load capacity:	50000 N
Harmonized Tariff Code	84823080
Calculation factor (Y2)	3,1
(Oil) Lubrication Speed	7500 r/min
Calculation factor (Y0)	2
Manufacturer Item Number	22206CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	6000 r/min
operating temperature range:	Maximum of +200 °C
Basic static load rating (C0)	50 kN
Basic dynamic load rating (C)	50 kN