


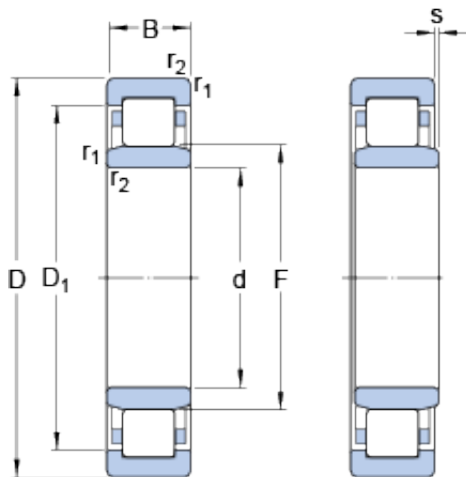

Bearing No. NU 3080 MA

s	7.1 mm
d	400 mm
D	600 mm
B	148 mm
F	449 mm
s max.	7.1 mm
Size (mm)	600x400x148
Width (mm)	148
Mass bearing	156 kg
D_1	537 mm
Limiting speed	1400 r/min
Bearing number	NU 3080 MA
Reference speed	950 r/min
Limiting value e	0.3
Bore Diameter (mm)	600
r_a max.	4 mm
D_a max.	582 mm
d_b min.	454 mm
d_a max.	442 mm
d_a min.	418 mm
Axial load factor Y	0
Outer Diameter (mm)	400
d_a - max.	442 mm
d_a - min.	418 mm
r_a - max.	4 mm
$r_{1,2}$ min.	5 mm
D_a - max.	582 mm
d_b - min.	454 mm
D_1 ?	537 mm
$r_{1,2}$ - min.	5 mm

Basic dynamic load rating C	2810 kN
Basic dynamic load rating - C	2810 kN
Fatigue load limit P_u	425 kN
Calculation factor k_r	0.17
Calculation factor - k_r	0.17
Fatigue load limit - P_u	425 kN
Basic static load rating C_0	5300 kN
Basic static load rating - C_0	5300 kN