


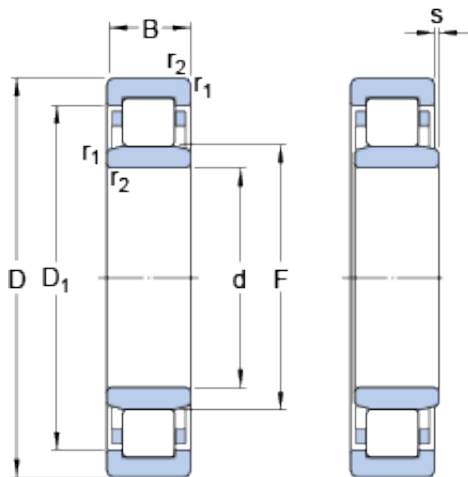

Bearing No. NU 3084 ECMA

s	13 mm
d	420 mm
D	620 mm
B	150 mm
F	458.2 mm
s max.	13 mm
Size (mm)	620x420x150
Width (mm)	150
Mass bearing	160 kg
D_1	556 mm
Limiting speed	1400 r/min
Bearing number	NU 3084 ECMA
Reference speed	900 r/min
Limiting value e	0.3
Bore Diameter (mm)	620
r_a max.	4 mm
D_a max.	602 mm
d_b min.	478 mm
d_a max.	450 mm
d_a min.	438 mm
Axial load factor Y	0.4
Outer Diameter (mm)	420
d_a - max.	450 mm
d_a - min.	438 mm
r_a - max.	4 mm
$r_{1,2}$ min.	5 mm
D_a - max.	602 mm
d_b - min.	478 mm
D_1 ?	556 mm
$r_{1,2}$ - min.	5 mm

Basic dynamic load rating C	2920 kN
Basic dynamic load rating - C	2920 kN
Fatigue load limit P_u	430 kN
Calculation factor k_r	0
Calculation factor - k_r	0.17
Fatigue load limit - P_u	430 kN
Basic static load rating C_0	5400 kN
Basic static load rating - C_0	5400 kN