


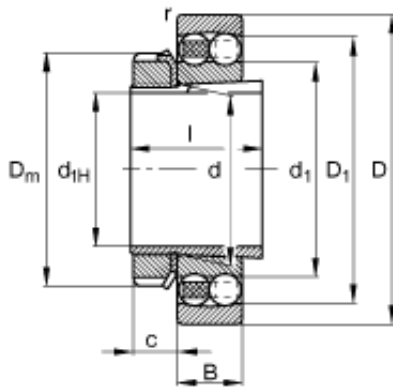

Bearing No. 2222-K-M-C3 + H322

	H322 / Adapter sleeve
d	110 mm
m	7,27 kg / Weight
e	0,28
D	200 mm
B	53 mm
l	77 mm
c	21 mm
Size (mm)	100x200x53
Width (mm)	53
m_1	2,21 kg / Weight, adapter sleeve
Y_1	2,23
d_1	136,9 mm
Y_2	3,45
D_m	145 mm
C_r	126000 N / Dynamic load rating (radial)
D_1	174,1 mm
Y_0	2,33
n_G	5000 1/min / Limiting speed
n_B	5200 1/min / Reference speed
C_{0r}	51000 N / Static load rating (radial)
Bearing number	2222-K-M-C3 + H322
C_{ur}	2550 N / Fatigue limit load, radial
d_{1H}	100 mm
$r_{a \max}$	2,1 mm

$d_{b \text{ min}}$	118 mm
$D_{a \text{ max}}$	188 mm
$B_{a \text{ min}}$	6 mm
$d_{a \text{ max}}$	122 mm
Bore Diameter (mm)	100
Outer Diameter (mm)	200