


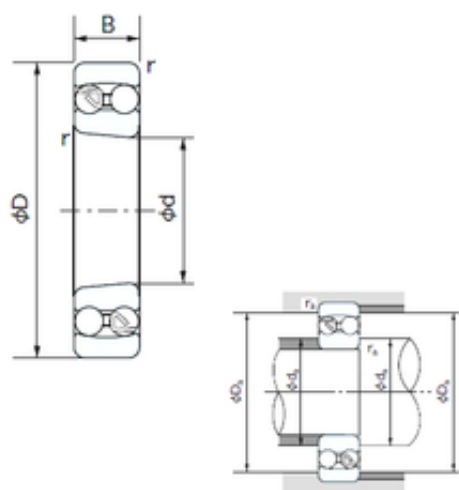

Bearing No. 1306K

D	72 mm
d	30 mm
B	19 mm
C	19 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
UNSPSC	31171532
Weight	0.387 Kg
Da max.	65.5 mm
ra max.	1.0 mm
da min.	36.5 mm
r1 min.	1.1 mm
Category	Self Aligning Ball Bearings
Size (mm)	30x72x19
Enclosure	Open
Inventory	0.0
Width (mm)	19
Weight / LBS	0.85319
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00152
Keyword String	Self Aligning
Other Features	Allowable Misalignment 3 Deg 1:12 Taper
Adapter Sleeve	H-306X
Bearing number	1306K
Mounting Method	Tapered Adapter
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0

Long Description	30MM Bore; Tapered Adapter Mount; 72MM Outside Diameter; 19MM Inner Race Width; 19MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Outer Race Width	0.748 Inch 19 Millimeter
Outside Diameter	2.835 Inch 72 Millimeter
Inner Race Width	0.748 Inch 19 Millimeter
Manufacturer URL	http://www.nachi.com
Manufacturer Name	NACHI
Weight / Kilogram	0
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Calculation factor (e)	0.26
(Oil) Lubrication Speed	11000 r/min
Number of Rows of Balls	Double Row
Calculation factor (Y0)	2.52
Calculation factor (Y1)	2.40
(Grease) Lubrication Speed	9000 r/min
Basic static load rating (C0)	6,3 kN
Basic dynamic load rating (C)	21,3 kN