


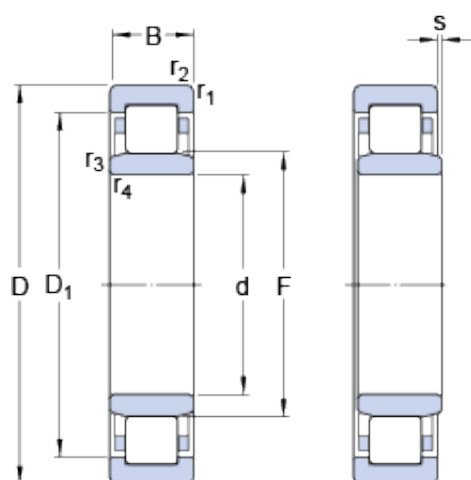

Bearing No. NU 2340 ECML

s	9.4 mm
d	200 mm
D	420 mm
B	138 mm
F	253 mm
s max.	9.4 mm
Size (mm)	420x200x138
Width (mm)	138
Mass bearing	92.4 kg
D_1	357.6 mm
Limiting speed	2800 r/min
Bearing number	NU 2340 ECML
Reference speed	1400 r/min
Limiting value e	0.3
d_a max.	247 mm
d_a min.	220 mm
Bore Diameter (mm)	420
r_a max.	4 mm
D_a max.	399.8 mm
r_b max.	4 mm
d_b min.	257 mm
Axial load factor Y	0.4
Outer Diameter (mm)	200
r_b - max.	4 mm
r_a - max.	4 mm
$r_{1,2}$ min.	5 mm
d_a - min.	220 mm
D_a - max.	399.8 mm
d_b - min.	257 mm
d_a - max.	247 mm

$r_{3,4}$ min.	5 mm
D_1 ?	357.6 mm
$r_{3,4}$ - min.	5 mm
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	1980 kN
Basic dynamic load rating - C	1980 kN
Fatigue load limit P_u	255 kN
Calculation factor k_r	0.38
Calculation factor - k_r	0.38
Fatigue load limit - P_u	255 kN
Basic static load rating C_0	2800 kN
Basic static load rating - C_0	2800 kN