


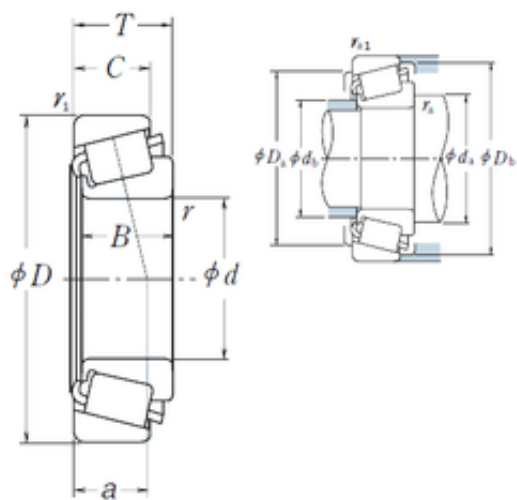

Bearing No. 13175/13318

e	0.53
d	44,45 mm
D	80,962 mm
T	19,05 mm
B	17,462 mm
C	14,288 mm
a	20,1 mm
Da	72 mm
B_	17.462
Db	76 mm
da	50 mm
Y0	0.63
db	50 mm
C0	57
D_	80.962
Z_	21
C_	14.288
Y1	1.1
DE_	69.972
SLR	11
D_a	72
DI_	56.188
DA1	7.782
DA2	7.019
CUP	0.144
DA_	7.403
D_b	76
RAr	111.502
SDM_	63.339
KBRG	3161

yobi	13175/13318
CONE	0.252
ALP21	38
ALP22	46
ALP23	0
BETA_	2
BET21	4
BET23	0
BET22	0
r min.	0,3 mm
LangID	1
Weight	0,396 Kg
ALPHA_	19.383
r1 min.	1,5 mm
ra max.	0,3 mm
Oil rpm	6000
outer r	1.5
hidYobi	13175/13318
GRS rpm	4300
inner r	0.3
hidTable	ecat_NSTPRI
inner ra	0.3
outer rb	1.5
ra1 max.	1,5 mm
Size (mm)	44.45x80.962x19.05
SHOG_yobi	13175R/13318R
Prod_Type3	TRBSR_ID_A
Width (mm)	19,05
Bearing number	13175/13318
Bore Diameter (mm)	44,45
Outer Diameter (mm)	80,962
Calculation factor (e)	0,53

(Oil) Lubrication Speed	6000 r/min
Calculation factor (Y0)	0,63
(Grease) Lubrication Speed	4300 r/min
Basic static load rating (C0)	57 kN
Basic dynamic load rating (C)	45 kN