


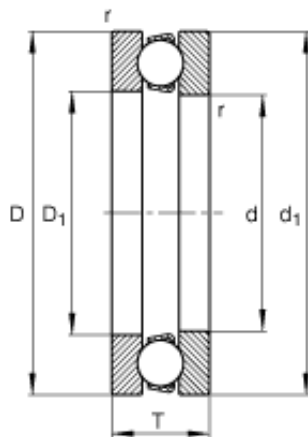

Bearing No. 511/500-MP

A	56 / Factor min. load
m	44,9 kg / Weight
d	500 mm
D	600 mm
T	80 mm
d1	595 mm
D1	505 mm
Weight	44,9 Kg
r min.	2,1 mm
da min.	560 mm
Da max.	540 mm
ra max.	2,1 mm
Size (mm)	500x600x80
Width (mm)	80
d ₁	595 mm
n _G	830 1/min / Limiting speed
D ₁	505 mm
C _a	550000 N / Dynamic load rating (axial)
Bearing number	511/500-MP
C _{ua}	63000 N / Fatigue limit load, axial
C _{0a}	3350000 N / Static load rating (axial)
Limiting speed	750 r/min
r _{min}	2,1 mm
r _{a max}	2,1 mm
d _{a min}	560 mm
D _{a max}	540 mm

Bore Diameter (mm)	500
Outer Diameter (mm)	600
Fatigue load limit (Pu)	63
Basic dynamic load rating (C)	550 kN
Basic static load rating (C0)	3350 kN