


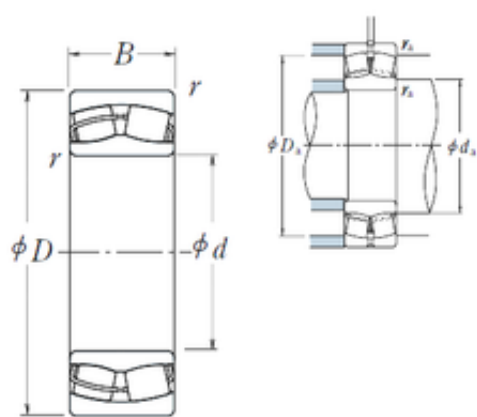

Bearing No. 24148CE4

e	0.38
r	4
d	240 mm
D	400 mm
B	160 mm
C	160 mm
Y3	1.8
X2	0.67
C0	3800
ra	3
Z_	20
D_	400
Y1	1.8
X0	1
Y2	2.7
B_	160
Y0	1.8
X1	1
DI_	279.344
DA_	42
DE_	360.819
SIR	63
Bore	9.449 Inch 240 Millimeter
Noun	Bearing
bomp	24148CE4
mass	79.5
ALP2	5
SBRG	41
ALP3	0

ALP1	14
SDM_	320.081
yobi	24148CE4
KBRG	2322
Width	6.299 Inch 160 Millimeter
ALPHA_	0.246
da max	268 mm
Da min	341 mm
r min.	4 mm
Weight	79,5 Kg
UNSPSC	31171510
da min	258
LangID	1
da min.	258 mm
D_a min	341
D_a max	382
ra max.	3 mm
GRS rpm	670
TSR rpm	750
Da max.	382 mm
Oil rpm	850
hidYobi	24148CE4
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Macha rpm	0
Size (mm)	240x400x160
Inventory	0.0
Enclosure	Open
Width (mm)	160
Prod_Type3	SRB_CTB_CB
Weight / LBS	79
Bore Profile	Straight

Inch - Metric	Metric
Cage Material	Steel
Product Group	B04311
Bearing number	24148CE4
Keyword String	Spherical
Relubricatable	Yes
Rolling Element	Spherical Roller Bearing
Mounting Method	Shaft Mount
Outside Diameter	15.748 Inch 400 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	240MM Straight Bore; 400MM Outside Diameter; 160MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Manufacturer Name	NSK
Weight / Kilogram	79
Withdrawal Sleeve	Not Applicable
Internal Clearance	C0-Medium
Bore Diameter (mm)	240
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	400
Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,38
Calculation factor (Y2)	2,7
Calculation factor (Y0)	1,8
(Oil) Lubrication Speed	850 r/min

Manufacturer Item Number	24148CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	670 r/min
Basic static load rating (C0)	3800 kN
Basic dynamic load rating (C)	2130 kN