


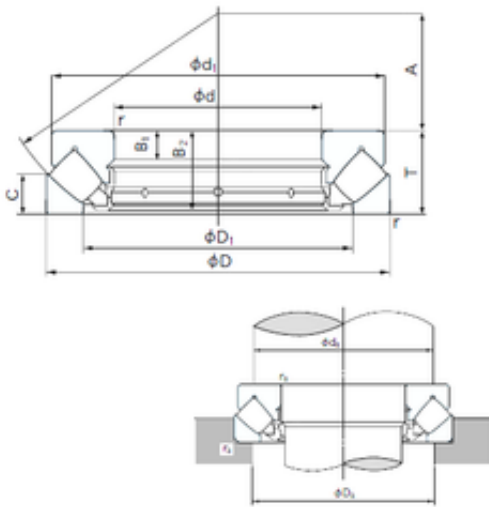

Bearing No. 29330E

C	29 mm
B	20 mm
d	150 mm
D	250 mm
T	60 mm
A	87 mm
B1	20 mm
D1	194 mm
d1	240 mm
B2	57 mm
Width	60 mm
r min.	2.1 mm
Weight	11.7 Kg
da min.	195 mm
Da max.	215 mm
ra max.	2 mm
da (min)	195 mm
Da (max)	215 mm
ra (max)	2 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	150 mm
Size (mm)	150x250x60
Width (mm)	60
Configuration	Single Row
Bearing number	29330E
Outside Diameter	250 mm
Static Load Rating	2,840,000 N
Bore Diameter (mm)	150
Dynamic Load Rating	735,000 N

Outer Diameter (mm)	250
Limiting Speed - Oil	1,600 rpm
Fillet Radius/Chamfer	2.1 mm
Basic dynamic load rating (C)	735 kN
Basic static load rating (C0)	2840 kN