


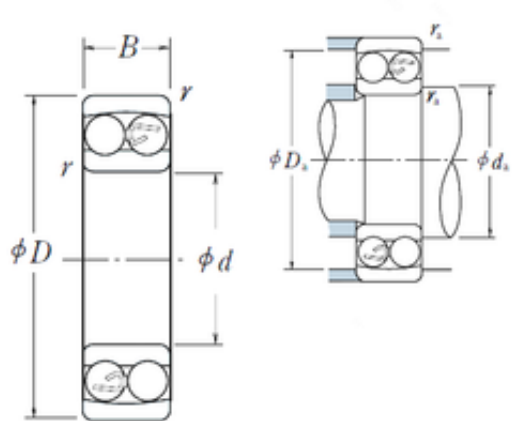

Bearing No. 2220

r	2.1
d	100 mm
D	180 mm
B	46 mm
C	46 mm
e	0.27
Y0	2.5
X1	1
B_	46
ra	2
Y2	3.7
D_	180
Y3	2.4
C0	38.5
X0	1
da	111
X2	0.65
PCD	140
D_a	169
SRI	10.83
SRE	0
mass	4.51
CAng	10.085
KBRG	1354
yobi	2220
SREX	0
SRIX	0.08
SRIN	0
SREN	0
r min.	2,1 mm

Weight	4,53 Kg
LangID	1
GRS rpm	3200
cyl dia	20.638
Oil rpm	3800
hidYobi	2220
da min.	111 mm
Da max.	169 mm
ra max.	2 mm
hidTable	ecat_NSSAB
cyl count	18
Size (mm)	100x180x46
Prod_Type3	SABB_SA_CB
Width (mm)	46
groove inner	119.345
groove outer	162.835
Bearing number	2220
Bore Diameter (mm)	100
Outer Diameter (mm)	180
Calculation factor (e)	0,27
(Oil) Lubrication Speed	3 800 r/min
Calculation factor (Y0)	2,5
Calculation factor (Y2)	3,7
(Grease) Lubrication Speed	3 200 r/min
Basic static load rating (C0)	38,5 kN
Basic dynamic load rating (C)	94,5 kN