


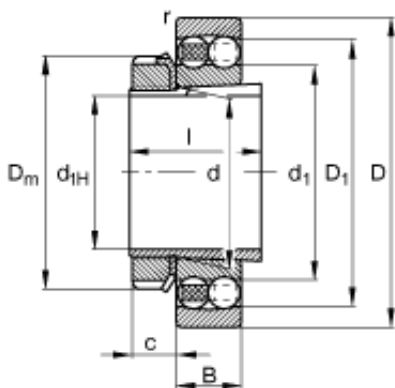

Bearing No. 1308-K-TVH-C3 + H308

	H308 / Adapter sleeve
d	40 mm
m	0,698 kg / Weight
e	0,25
D	90 mm
B	23 mm
l	36 mm
c	11 mm
Size (mm)	35x90x23
Width (mm)	23
m ₁	0,19 kg / Weight, adapter sleeve
Y ₁	2,52
d ₁	57,8 mm
Y ₂	3,9
D _m	58 mm
C _r	30000 N / Dynamic load rating (radial)
D ₁	75,3 mm
Y ₀	2,64
n _G	8500 1/min / Limiting speed
n _B	10000 1/min / Reference speed
C _{0r}	9600 N / Static load rating (radial)
Bearing number	1308-K-TVH-C3 + H308
C _{ur}	600 N / Fatigue limit load, radial /
d _{1H}	35 mm
r _{a max}	1,5 mm

$d_{b \text{ min}}$	44 mm
$D_{a \text{ max}}$	81 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	55 mm
Bore Diameter (mm)	35
Outer Diameter (mm)	90