


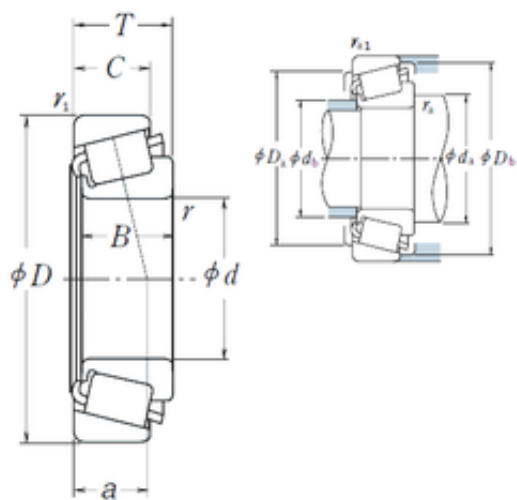

Bearing No. 13685/13620

e	0.4
d	38,1 mm
D	69,012 mm
T	19,05 mm
B	19,05 mm
C	15,083 mm
a	15,8 mm
Da	62 mm
B_	19.05
Db	65 mm
da	49,5 mm
Y0	0.82
db	43 mm
C0	61
D_	69.012
Z_	20
C_	15.083
Y1	1.5
DE_	60.157
SLR	12.7
D_a	62
DI_	46.406
DA1	7.5
DA2	6.727
CUP	0.105
DA_	7.115
D_b	65
RAr	122.796
SDM_	53.379
KBRG	3161

yobi	13685/13620
CONE	0.191
ALP21	30
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	30
r min.	3,5 mm
LangID	1
Weight	0,296 Kg
ALPHA_	15
r1 min.	0,8 mm
ra max.	3,5 mm
Oil rpm	7100
outer r	0.8
hidYobi	13685/13620
GRS rpm	5300
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	0.8
ra1 max.	0,8 mm
Size (mm)	38.1x69.012x19.05
SHOG_yobi	13685R/13620R
Prod_Type3	TRBSR_ID_A
Width (mm)	19,05
Bearing number	13685/13620
Bore Diameter (mm)	38,1
Outer Diameter (mm)	69,012
Calculation factor (e)	0,4

(Oil) Lubrication Speed	7100 r/min
Calculation factor (Y0)	0,82
(Grease) Lubrication Speed	5300 r/min
Basic static load rating (C0)	61 kN
Basic dynamic load rating (C)	49 kN