


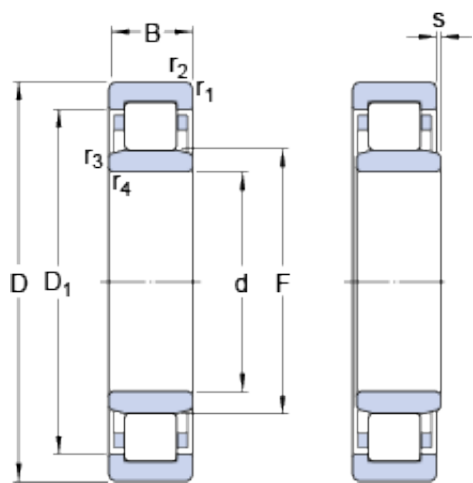

Bearing No. NU 226 ECML

D	230 mm
d	130 mm
B	40 mm
F	153.5 mm
s	2.1 mm
Bore	5.118 Inch 130 Millimeter
Noun	Bearing
Width	1.575 Inch 40 Millimeter
s max.	2.1 mm
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	Yes
Separable	Inner Ring - Both Sides
Size (mm)	230x130x40
Inventory	0.0
Snap Ring	No
Width (mm)	40
Bore Profile	Straight
Weight / LBS	15.922
Mass bearing	7.13 kg
Inch - Metric	Metric
Product Group	B04144
D ₁	201.2 mm
Cage Material	Brass
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer

	Ring ID
Relubricatable	Yes
Bearing number	NU 226 ECML
Limiting speed	5300 r/min
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Reference speed	3200 r/min
Outside Diameter	9.055 Inch 230 Millimeter
Limiting value e	0.2
Manufacturer URL	http://www.skf.com
Long Description	130MM Bore; Straight Bore Profile; 230MM Outside Diameter; 40MM Width; Brass Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Int
Weight / Kilogram	7.229
Manufacturer Name	SKF
d _a max.	150 mm
D _a max.	215.4 mm
d _b min.	157 mm
Internal Clearance	C0-Medium
r _a max.	2.5 mm
d _a min.	144 mm
r _b max.	2.5 mm
Bore Diameter (mm)	230
Axial load factor Y	0.6
Outer Diameter (mm)	130
d _a - max.	150 mm
	157 mm

d ^b - min.	
-----------------------	--

d_a - min.	144 mm
D_a - max.	215.4 mm
r_a - max.	2.5 mm
r_b - max.	2.5 mm
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	3 mm
$r_{3,4}$ min.	3 mm
D_1 ?	201.2 mm
Harmonized Tariff Code	8482.50.00.00
$r_{1,2}$ - min.	3 mm
$r_{3,4}$ - min.	3 mm
Manufacturer Item Number	NU 226 ECML
Number of Rows of Rollers	Single Row
Basic dynamic load rating C	415 kN
Basic dynamic load rating - C	415 kN
Fatigue load limit P_u	51 kN
Calculation factor k_r	0.23
Calculation factor - k_r	0.23
Fatigue load limit - P_u	51 kN
Basic static load rating C_0	455 kN
Basic static load rating - C_0	455 kN