


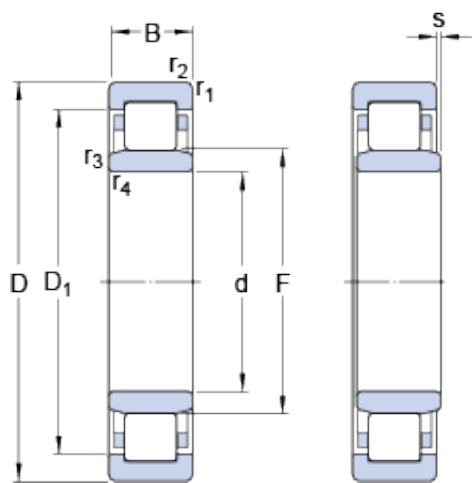

Bearing No. NU 226 ECP

D	230 mm
d	130 mm
B	40 mm
F	153.5 mm
s	2.1 mm
Bore	5.118 Inch 130 Millimeter
Noun	Bearing
Width	1.575 Inch 40 Millimeter
s max.	2.1 mm
UNSPSC	31171547
series:	NU2
Profile	Complete with Outer and Inner Ring
flanges:	(2) Outer Ring
Retainer	Yes
Category	Cylindrical Roller Bearing
Size (mm)	230x130x40
Snap Ring	No
Inventory	0.0
Separable	Inner Ring - Both Sides
bore type:	Straight
Width (mm)	40
Bore Profile	Straight
Mass bearing	6.44 kg
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
Weight / LBS	14.401
maximum rpm:	3400 RPM

closure type:	Open
Inch - Metric	Metric
Product Group	B04144
Cage Material	Polymer
D ₁	200.3 mm
bore diameter:	130 mm
overall width:	40 mm
cage material:	Polyamide
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Relubricatable	Yes
fillet radius:	2.5 mm
Bearing number	NU 226 ECP
Limiting speed	3400 r/min
Rolling Element	Cylindrical Roller Bearing
number of rows:	1
Precision Class	RBEC 1 ISO P0
finish/coating:	Uncoated
Reference speed	3200 r/min
ring separation:	Separable Ring
Limiting value e	0.2
Long Description	130MM Bore; Straight Bore Profile; 230MM Outside Diameter; 40MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium I
Manufacturer URL	http://www.skf.com
Outside Diameter	9.055 Inch 230

	Millimeter
bearing material:	Steel
outside diameter:	230 mm
precision rating:	RBEC 1 (ISO Class Normal)
outer ring width:	40 mm
Weight / Kilogram	6.538
Manufacturer Name	SKF
D _a max.	215.4 mm
d _a max.	150 mm
r _a max.	2.5 mm
r _b max.	2.5 mm
d _a min.	144 mm
Bore Diameter (mm)	230
Internal Clearance	C0-Medium
d _b min.	157 mm
Outer Diameter (mm)	130
Axial load factor Y	0.6
internal clearance:	C0
r _{3,4} min.	3 mm
r _{1,2} min.	3 mm
d _a - min.	144 mm
r _a - max.	2.5 mm
Minimum Buy Quantity	N/A
r _b - max.	2.5 mm
d _a - max.	150 mm
d _b - min.	157 mm
D _a - max.	215.4 mm
static load capacity:	455 kN
D ₁ ?	200.3 mm
r _{3,4} - min.	3 mm
Harmonized Tariff Code	8482.50.00.00
	3 mm

r _{1,2} - min.	
-------------------------	--

dynamic load capacity:	415 kN
Manufacturer Item Number	NU 226 ECP
Number of Rows of Rollers	Single Row
Basic dynamic load rating C	415 kN
operating temperature range:	Maximum of +300 °F
Basic dynamic load rating - C	415 kN
Fatigue load limit P_u	51 kN
Calculation factor k_r	0.15
Fatigue load limit - P_u	51 kN
Calculation factor - k_r	0.15
Basic static load rating C_0	455 kN
Basic static load rating - C_0	455 kN