


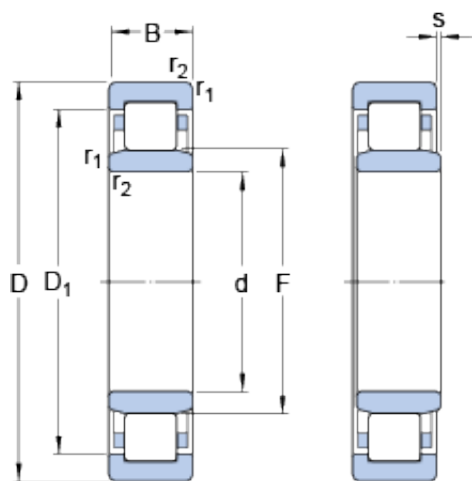

Bearing No. NU 2260 MA

D	540 mm
d	300 mm
B	140 mm
F	364 mm
s	5.6 mm
Bore	11.811 Inch 300 Millimeter
Noun	Bearing
Width	5.512 Inch 140 Millimeter
s max.	5.6 mm
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	Yes
Separable	Inner Ring - Both Sides
Size (mm)	540x300x140
Inventory	0.0
Snap Ring	No
Width (mm)	140
Bore Profile	Straight
Weight / LBS	355.936
Mass bearing	145 kg
Product Group	B04144
D ₁	451 mm
Inch - Metric	Metric
Cage Material	Brass
Limiting speed	1800 r/min
Other Features	Plain Inner Ring 2 Rib

	Outer Ring Cage on Outer Ring ID
Relubricatable	Yes
Bearing number	NU 2260 MA
Precision Class	RBEC 1 ISO P0
Rolling Element	Cylindrical Roller Bearing
Reference speed	1200 r/min
Long Description	300MM Bore; Straight Bore Profile; 540MM Outside Diameter; 140MM Width; Brass Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium In
Limiting value e	0.3
Outside Diameter	21.26 Inch 540 Millimeter
Manufacturer URL	http://www.skf.com
Weight / Kilogram	161.6
Manufacturer Name	SKF
D _a max.	520 mm
Bore Diameter (mm)	540
d _b min.	368 mm
d _a min.	320 mm
d _a max.	352 mm
r _a max.	4 mm
Internal Clearance	C0-Medium
Outer Diameter (mm)	300
Axial load factor Y	0
d _a - max.	352 mm
d _a - min.	320 mm
Minimum Buy Quantity	N/A

d_b - min.	368 mm
D_a - max.	520 mm
r_a - max.	4 mm
$r_{1,2}$ min.	5 mm
D_1 ?	451 mm
Harmonized Tariff Code	8482.50.00.00
$r_{1,2}$ - min.	5 mm
Manufacturer Item Number	NU 2260 MA
Number of Rows of Rollers	Single Row
Basic dynamic load rating C	2090 kN
Basic dynamic load rating - C	2090 kN
Fatigue load limit P_u	300 kN
Calculation factor k_r	0.2
Calculation factor - k_r	0.2
Fatigue load limit - P_u	300 kN
Basic static load rating C_0	3450 kN
Basic static load rating - C_0	3450 kN