


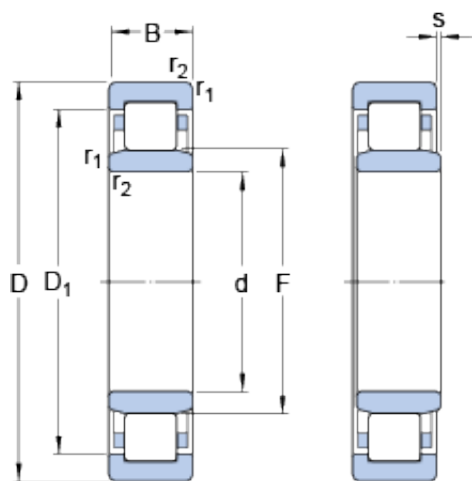

Bearing No. NU 2268 MA

D	620 mm
d	340 mm
B	165 mm
F	416 mm
s	8 mm
Bore	13.386 Inch 340 Millimeter
Noun	Bearing
Width	6.496 Inch 165 Millimeter
s max.	8 mm
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	Yes
Separable	Inner Ring - Both Sides
Size (mm)	620x340x165
Inventory	0.0
Snap Ring	No
Width (mm)	165
Bore Profile	Straight
Weight / LBS	534.753
Mass bearing	226 kg
Product Group	B04144
D ₁	515 mm
Inch - Metric	Metric
Cage Material	Brass
Limiting speed	1500 r/min
Other Features	Plain Inner Ring 2 Rib

	Outer Ring Cage on Outer Ring ID
Relubricatable	Yes
Bearing number	NU 2268 MA
Precision Class	RBEC 1 ISO P0
Rolling Element	Cylindrical Roller Bearing
Reference speed	1000 r/min
Long Description	340MM Bore; Straight Bore Profile; 620MM Outside Diameter; 165MM Width; Brass Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium In
Limiting value e	0.3
Outside Diameter	24.409 Inch 620 Millimeter
Manufacturer URL	http://www.skf.com
Weight / Kilogram	242.78
Manufacturer Name	SKF
D _a max.	594 mm
Bore Diameter (mm)	620
d _b min.	421 mm
d _a min.	366 mm
d _a max.	401 mm
r _a max.	5 mm
Internal Clearance	C0-Medium
Outer Diameter (mm)	340
Axial load factor Y	0.4
d _a - max.	401 mm
d _a - min.	366 mm
Minimum Buy Quantity	N/A

d_b - min.	421 mm
D_a - max.	594 mm
r_a - max.	5 mm
$r_{1,2}$ min.	6 mm
D_1 ?	515 mm
Harmonized Tariff Code	8482.50.00.00
$r_{1,2}$ - min.	6 mm
Manufacturer Item Number	NU 2268 MA
Number of Rows of Rollers	Single Row
Basic dynamic load rating C	2640 kN
Basic dynamic load rating - C	2640 kN
Fatigue load limit P_u	365 kN
Calculation factor k_r	0.3
Calculation factor - k_r	0.2
Fatigue load limit - P_u	365 kN
Basic static load rating C_0	4500 kN
Basic static load rating - C_0	4500 kN