


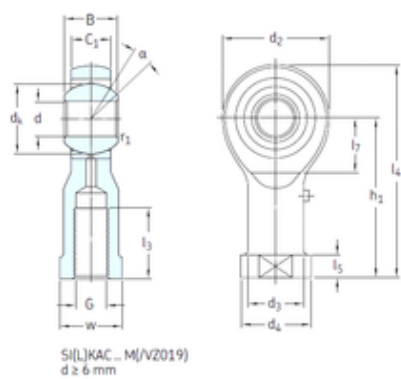

Bearing No. SILKAC22M

B	28 mm
d	22 mm
w	32 Tolerance h14
l5	12 mm
d2	55 mm
d3	30 mm
dk	38,1 mm
h1	84 mm
C1	21 mm
Angle	15 °
Weight	0,5 Kg
l3 min.	33 mm
r1 min.	0,3 mm
l7 min.	27 mm
l4 max.	114 mm
d4 max.	40 mm
Thread (G)	M22x1,5 Tolerance 6H
Bearing number	SILKAC22M
Bore Diameter (mm)	22
Basic dynamic load rating (C)	38 kN