


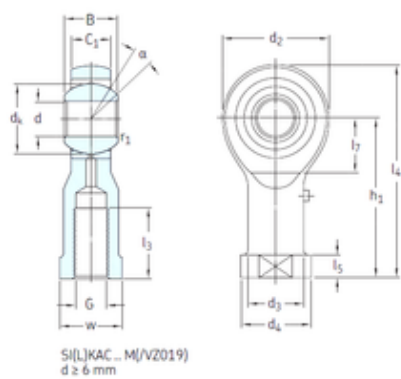

Bearing No. SILKAC25M

B	31 mm
d	25 mm
w	36 Tolerance h14
l5	12 mm
d2	61 mm
d3	33,5 mm
dk	42,8 mm
h1	94 mm
C1	23 mm
Angle	15 °
Weight	0,65 Kg
l3 min.	36 mm
r1 min.	0,3 mm
l7 min.	30 mm
l4 max.	127 mm
d4 max.	44 mm
Thread (G)	M24x2 Tolerance 6H
Bearing number	SILKAC25M
Bore Diameter (mm)	25
Basic dynamic load rating (C)	47,5 kN