


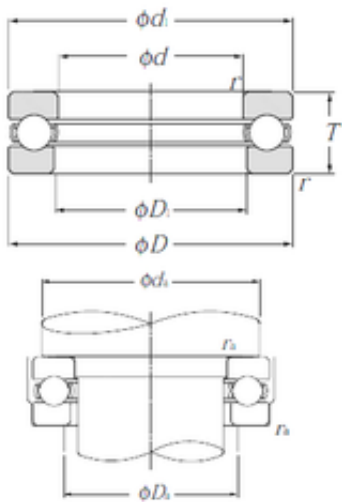

Bearing No. 51102

D	28 mm
d	15 mm
T	9 mm
d1	28 mm
D1	16 mm
Noun	Bearing
Bore 2	0.63 Inch 16 Millimeter
Weight	0,024 Kg
Height	0.354 Inch 9 Millimeter
UNSPSC	31171552
Banded	No
r min.	0,3 mm
Bore 1	0.591 Inch 15 Millimeter
da min.	23 mm
ra max.	0,3 mm
Da max.	20 mm
series:	511
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	15x28x9
Width (mm)	9
Weight / LBS	0.05291
maximum rpm:	8800 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	15 mm
overall width:	9 mm
Keyword String	Ball Thrust

cage material:	Resin
fillet radius:	0.3 mm
Bearing number	51102
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	1.102 Inch 28 Millimeter
Long Description	15MM Bore 1; 16MM Bore 2; 28MM Outside Diameter; 9MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
precision rating:	ISO Class 0
Weight / Kilogram	0.021
Manufacturer Name	NTN
outside diameter:	28 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	15
Outer Diameter (mm)	28
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
static load capacity:	16800 N
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	10500 N
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item	51102

Number	
outside diameter design:	Straight
(Grease) Lubrication Speed	6 200 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	16,8 kN
Basic dynamic load rating (C)	10,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter