
Loyal | 24138CK30E4

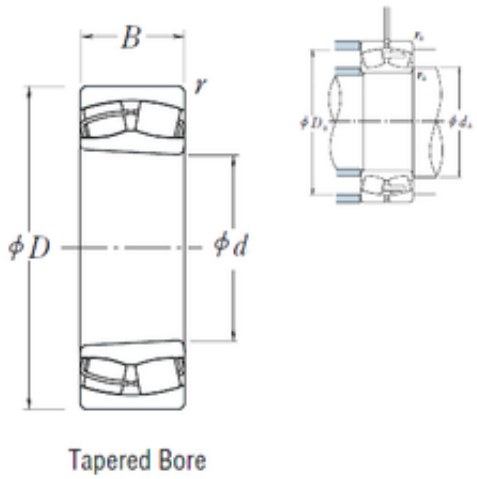

Tapered Bore

Bearing No. 24138CK30E4

r	3
d	190 mm
D	320 mm
B	128 mm
C	128 mm
e	0.4
Y2	2.5
C0	2330
D_	320
B_	128
Y0	1.6
ra	2.5
Y1	1.6
X0	1
X1	1
X2	0.67
Y3	1.7
Z_	19
DE_	285.914
DA_	33.5
SIR	51
DI_	221.197
bomp	24138CK30E4
SBRG	41
KBRG	2322
SDM_	253.556
ALP1	15
mass	41.5
yobi	24138CK30E4
ALP3	0

ALP2	0
da min	204
r min.	3 mm
da max	211 mm
Da min	269 mm
Weight	41,5 Kg
LangID	1
ALPHA_	0.262
D_a max	306
Da max.	306 mm
da min.	204 mm
Oil rpm	1100
D_a min	269
GRS rpm	850
hidYobi	24138CK30E4
TSR rpm	1000
ra max.	2,5 mm
Category	Bearings
hidTable	ecat_NSSPHR
Macha rpm	0
Size (mm)	190x320x128
Inventory	0.0
Prod_Type3	SRB_CTB_TB
Width (mm)	128
Product Group	B04311
Bearing number	24138CK30E4
Manufacturer Name	NSK
Weight / Kilogram	31
Bore Diameter (mm)	190
Outer Diameter (mm)	320
Minimum Buy Quantity	N/A
Calculation factor (e)	0,4

(Oil) Lubrication Speed	1100 r/min
Calculation factor (Y0)	1,6
Calculation factor (Y2)	2,5
(Grease) Lubrication Speed	850 r/min
Basic dynamic load rating (C)	1370 kN
Basic static load rating (C0)	2330 kN