


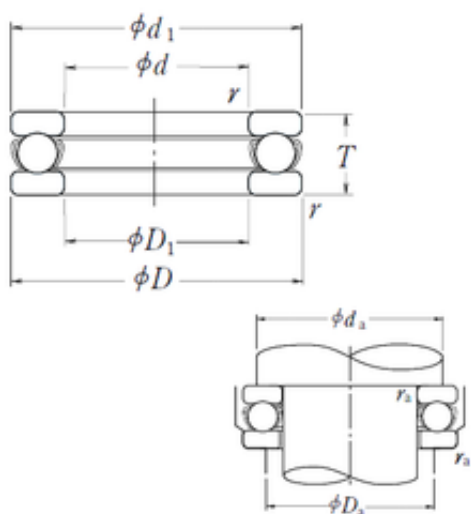

Bearing No. 51105

C	19.7
r	0.6
d	25 mm
D	42 mm
T	11 mm
D_	42
da	35
C0	37
Z_	15
ra	0.6
B_	11
d1	42 mm
D1	26 mm
T_	11
D_1	26
SRE	3.4
D_a	32
DA_	6.35
SRI	3.4
mass	0.056
SRIX	0.04
SRIN	0
SREX	0.04
Noun	Bearing
KBRG	5111
SREN	0
yobi	51105
SDM_	33.5
r min.	0,6 mm
Banded	No

LangID	1
Bore 1	0.984 Inch 25 Millimeter
Weight	0,056 Kg
Height	0.433 Inch 11 Millimeter
UNSPSC	31171552
Bore 2	1.024 Inch 26 Millimeter
series:	511
Oil rpm	7100
Da max.	32 mm
da min.	35 mm
GRS rpm	4800
ra max.	0,6 mm
hidYobi	51105
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	25x42x11
race type:	Flat
Width (mm)	11
Prod_Type3	TB_SD_WFS
Weight / LBS	0.12346
maximum rpm:	7100 RPM
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
fillet radius:	0.6 mm
Bearing number	51105
bore diameter:	25 mm
Thrust Bearing	Yes
Other Features	Single Row With Flat

	Seat
overall width:	11 mm
cage material:	Steel
Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Outside Diameter	1.654 Inch 42 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	25MM Bore 1; 26MM Bore 2; 42MM Outside Diameter; 11MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
precision rating:	ABEC 1 (ISO Class Normal)
Weight / Kilogram	0.05
outside diameter:	42 mm
Manufacturer Name	NSK
Bore Diameter (mm)	25
Outer Diameter (mm)	42
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	3800 kg
dynamic load capacity:	2010 kg
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	51105
outside diameter design:	Straight
Single or Double	Single Direction

Direction	
(Grease) Lubrication Speed	4800 r/min
operating temperature range:	Maximum of +120 °C
Basic static load rating (C0)	37 kN
Basic dynamic load rating (C)	19,7 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter