


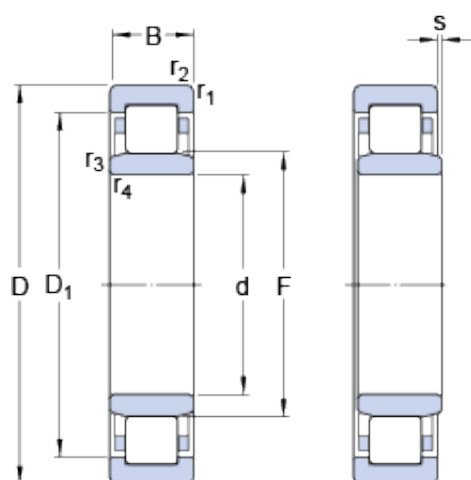

Bearing No. NU 2206 ECML

s	1.8 mm
d	30 mm
D	62 mm
B	20 mm
F	37.5 mm
s max.	1.8 mm
Size (mm)	62x30x20
Width (mm)	20
Mass bearing	0.33 kg
D_1	52.45 mm
Limiting speed	22000 r/min
Bearing number	NU 2206 ECML
Reference speed	13000 r/min
Limiting value e	0.3
d_a max.	36.1 mm
d_a min.	34.3 mm
Bore Diameter (mm)	62
r_a max.	1 mm
D_a max.	55.9 mm
r_b max.	0.6 mm
d_b min.	39 mm
Axial load factor Y	0.4
Outer Diameter (mm)	30
r_b - max.	0.6 mm
r_a - max.	1 mm
$r_{1,2}$ min.	1 mm
d_a - min.	34.3 mm
D_a - max.	55.9 mm
d_b - min.	39 mm
d_a - max.	36.1 mm

$r_{3,4}$ min.	0.6 mm
D_1 ?	52.45 mm
$r_{3,4}$ - min.	0.6 mm
$r_{1,2}$ - min.	1 mm
Basic dynamic load rating C	55 kN
Basic dynamic load rating - C	55 kN
Fatigue load limit P_u	6.1 kN
Calculation factor k_r	0.3
Calculation factor - k_r	0.3
Fatigue load limit - P_u	6.1 kN
Basic static load rating C_0	49 kN
Basic static load rating - C_0	49 kN