


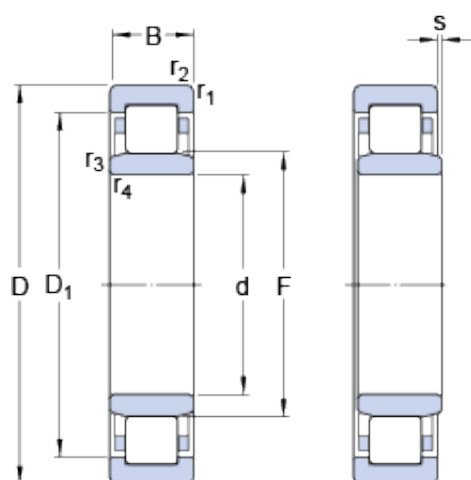

Bearing No. NU 2206 ECPH

|                     |              |
|---------------------|--------------|
| s                   | 1.8 mm       |
| d                   | 30 mm        |
| D                   | 62 mm        |
| B                   | 20 mm        |
| F                   | 37.5 mm      |
| s max.              | 1.8 mm       |
| Size (mm)           | 62x30x20     |
| Width (mm)          | 20           |
| Mass bearing        | 0.26 kg      |
| $D_1$               | 51.95 mm     |
| Limiting speed      | 14000 r/min  |
| Bearing number      | NU 2206 ECPH |
| Reference speed     | 13000 r/min  |
| Limiting value e    | 0.3          |
| $d_a$ max.          | 36.1 mm      |
| $d_a$ min.          | 34.3 mm      |
| Bore Diameter (mm)  | 62           |
| $r_a$ max.          | 1 mm         |
| $D_a$ max.          | 55.9 mm      |
| $r_b$ max.          | 0.6 mm       |
| $d_b$ min.          | 39 mm        |
| Axial load factor Y | 0.4          |
| Outer Diameter (mm) | 30           |
| $r_b$ - max.        | 0.6 mm       |
| $r_a$ - max.        | 1 mm         |
| $r_{1,2}$ min.      | 1 mm         |
| $d_a$ - min.        | 34.3 mm      |
| $D_a$ - max.        | 55.9 mm      |
| $d_b$ - min.        | 39 mm        |
| $d_a$ - max.        | 36.1 mm      |

|                                  |          |
|----------------------------------|----------|
| $r_{3,4}$ min.                   | 0.6 mm   |
| $D_1$ ?                          | 51.95 mm |
| $r_{3,4}$ - min.                 | 0.6 mm   |
| $r_{1,2}$ - min.                 | 1 mm     |
| Basic dynamic load rating C      | 55 kN    |
| Basic dynamic load rating - C    | 55 kN    |
| Fatigue load limit $P_u$         | 6.1 kN   |
| Calculation factor $k_r$         | 0.2      |
| Calculation factor - $k_r$       | 0.2      |
| Fatigue load limit - $P_u$       | 6.1 kN   |
| Basic static load rating $C_0$   | 49 kN    |
| Basic static load rating - $C_0$ | 49 kN    |