


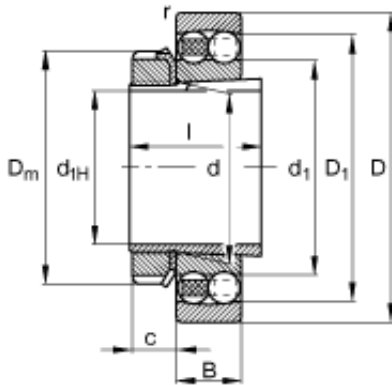

Bearing No. 2215-K-TVH-C3 + H315

|                |                                           |
|----------------|-------------------------------------------|
|                | H315 / Adapter sleeve                     |
| d              | 75 mm                                     |
| m              | 1,6 kg / Weight                           |
| e              | 0,26                                      |
| D              | 130 mm                                    |
| B              | 31 mm                                     |
| l              | 55 mm                                     |
| c              | 15 mm                                     |
| Size (mm)      | 65x130x31                                 |
| Width (mm)     | 31                                        |
| $m_1$          | 0,84 kg / Weight,<br>adapter sleeve       |
| $Y_1$          | 2,47                                      |
| $d_1$          | 93,3 mm                                   |
| $Y_2$          | 3,82                                      |
| $D_m$          | 98 mm                                     |
| $C_r$          | 44500 N / Dynamic load<br>rating (radial) |
| $D_1$          | 114,3 mm                                  |
| $Y_0$          | 2,59                                      |
| $n_G$          | 5300 1/min / Limiting<br>speed            |
| $n_B$          | 6200 1/min / Reference<br>speed           |
| $C_{0r}$       | 17600 N / Static load<br>rating (radial)  |
| Bearing number | 2215-K-TVH-C3 + H315                      |
| $C_{ur}$       | 1080 N / Fatigue limit<br>load, radial    |
| $d_{1H}$       | 65 mm                                     |
| $r_{a \max}$   | 1,5 mm                                    |

|                     |        |
|---------------------|--------|
| $d_{b \text{ min}}$ | 80 mm  |
| $D_{a \text{ max}}$ | 121 mm |
| $B_{a \text{ min}}$ | 12 mm  |
| $d_{a \text{ max}}$ | 84 mm  |
| Bore Diameter (mm)  | 65     |
| Outer Diameter (mm) | 130    |